
NOTES:

- 1.0 MATERIALS:
- 1.1 HOUSING & NUTS: STAINLESS STEEL PER ASTM-A582, TYPE 303.
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
- 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1457.
- 2.0 PLATING:
- 2.1 HOUSING & NUTS: PASSIVATED PER MIL-F-14072 AND QQ - P - 35
- 2.2 CENTER CONTACT: GOLD PER MIL-G-45204, TYPE II, CLASS 2.
- 3.0 ELECTRICAL SPECIFICATIONS:
- 3.1 FREQUENCY RANGE: DC to 18.0 GHz
- 3.2 VSWR: 1.05 + .005f(GHz)
- 3.3 IMPEDANCE: 50 OHMS
- 4.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

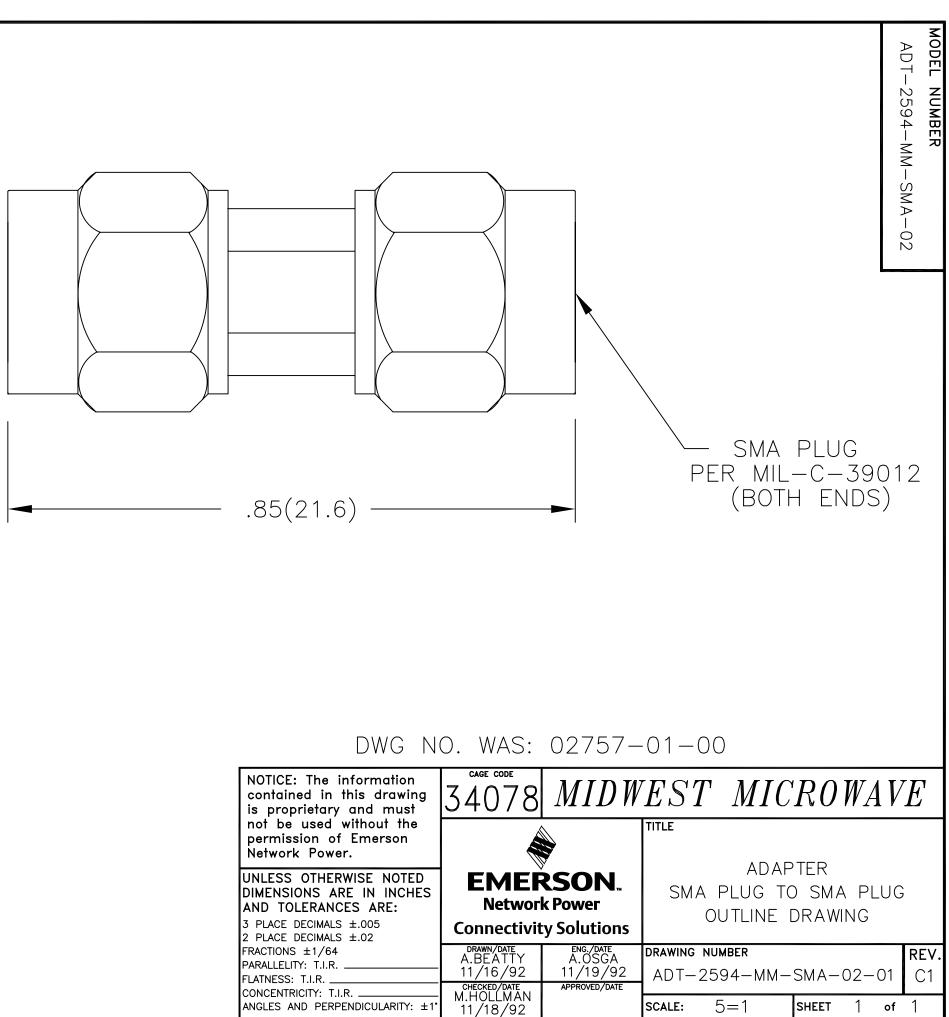

DATE	11/20/92	6/30/89	4/4/90	5/24/90	2/21/91	11/16/92	3/10/02
DESCRIPTION	RELEASED	ECR 6545	ECR 6933	MODEL NO. 001- TO 000	UPDATE MOD. NO	REDRAW ON CAD	ADDED TITLEBLOCK
REV.	I	A	В	B1	B2	ပ	C

OTICE: The information ontained in this drawing proprietary and must	^{cage code}
ot be used without the ermission of Emerson etwork Power.	
ILESS OTHERWISE NOTED MENSIONS ARE IN INCHES ID TOLERANCES ARE:	EME Netwo
PLACE DECIMALS ±.005 PLACE DECIMALS ±.02	Connectiv
ACTIONS ±1/64 RALLELITY: T.I.R NTNESS: T.I.R	drawn/date A.BEATTY 11/16/92
NCENTRICITY: T.I.R GLES AND PERPENDICULARITY: ±1*	checked/date M.HOLLMAN 11/18/92

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Emerson Connectivity Solutions: ADT-2594-MM-SMA-02