


# AM2F Series

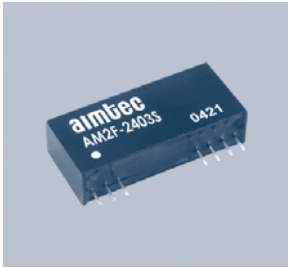

## 2 watt dc-dc converters

- REGULATED SINGLE OUTPUT
- 12 PIN SIP PACKAGE
- LOW RIPPLE & NOISE
- HIGH EFFICIENCY UP TO 68%
- INPUT/OUTPUT ISOLATION: 1000, 3000 & 5200VDC
- OPERATING TEMPERATURE: -25°C ... +71°C
- PIN-COMPATIBLE WITH MULTIPLE MANUFACTURERS

### GENERAL DESCRIPTION

Our AM2F series is a family of cost effective 2W single output DC-DC converters. These converters combine miniature package in a 12-pin SIP compatible case with high performance features such as 1000VDC, 3000VDC & 5200VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Input voltages of 5, 12 & 24VDC with producing output voltage levels of 3.3, 5, 7.2, 9, 12, 15, 18, 24VDC. High

performance features include high efficiency operation up to 68% and output voltage accuracy of  $\pm 2\%$  maximum. Standard features include an input range of  $\pm 10\%$  tolerance and low output noise and ripple. All models are package in a low profile 31.80x8.60x13.47mm 12 pin SIP non-conductive black plastic case. Operation is specified over the full operating temperature range of -25°C to +71°C with no derating required. Cooling is by free-air convection.

### ELECTRICAL SPECIFICATIONS

Specifications typical at +25°C, nominal input voltage, rated output current unless otherwise specified

#### Input Specifications:

Voltage range	$\pm 10\%$
Filter	p (Pi) Network

#### Isolation Specifications:

Rated voltage (60 sec)	1000, 3000 & 5200VDC
Resistance	> 1000MOhm
Capacitance	60pF, typ.

#### Output Specifications:

Voltage accuracy	$\pm 2\%$ , max.
Ripple & noise (at 20MHz BW)	75mVp-p, max.
Short circuit protection	Continuous
Short circuit restart	Automatic
Line voltage regulation	$\pm 0.5\%$ , max.
Load voltage regulation	$\pm 0.5\%$ , max.
Temperature coefficient	$\pm 0.02\%/^{\circ}\text{C}$ , typ.

#### General Specifications:

Efficiency	64% to 68%
Switching frequency	125KHz, typ. 100% load

#### Environmental Specifications:

Operating temperature (ambient)	-25°C ... +71°C
Storage temperature	-40°C ... +125°C
Case temperature	+90°C, max.
Derating	None required
Humidity (non-condensing)	Up to 90%
Cooling	Free-air Convection


#### Physical Specifications:

Dimensions	31.80x8.60x13.47mm 1.25x0.34x0.53inches
Weight	10.7g
Case material	Non-conductive black plastic

MTBF: > 1,024,000 hrs (MIL-HDBK-217F, Ground Benign,  $t=+25^{\circ}\text{C}$ )

Specifications are subject to change without notification

### OUTLINE DIMENSIONS & PIN CONNECTIONS

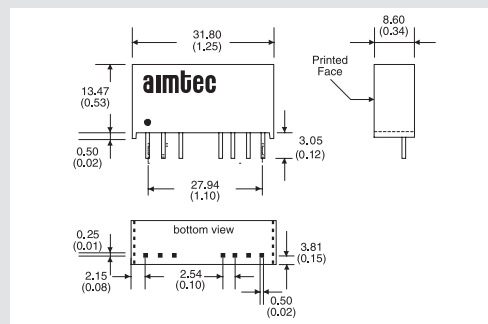

Pin	1000, 3000 & 5200VDC
	Single
1	+V Input
2	N.C.
3	N.C.
9	N.C.
10	-V Output
11	+V Output
12	-V Input

Continued on next page

# AM2F Series

## MODELS

Single regulated output

DC-DC CONVERTERS

Models			Input Voltage	Ouput Voltage	Ouput Current max.
Isolation 1000VDC	Isolation 3000VDC	Isolation 5200VDC			
AM2F-0503S	AM2F-0503SH30	AM2F-0503SH52	5V±10%	3.3VDC	600mA
AM2F-0505S	AM2F-0505SH30	AM2F-0505SH52		5VDC	400mA
AM2F-0507S	AM2F-0507SH30	AM2F-0507SH52		7.2VDC	278mA
AM2F-0509S	AM2F-0509SH30	AM2F-0509SH52		9VDC	222mA
AM2F-0512S	AM2F-0512SH30	AM2F-0512SH52		12VDC	167mA
AM2F-0515S	AM2F-0515SH30	AM2F-0515SH52		15VDC	134mA
AM2F-0518S	AM2F-0518SH30	AM2F-0518SH52		18VDC	111mA
AM2F-0524S	AM2F-0524SH30	AM2F-0524SH52		24VDC	83mA
AM2F-1203S	AM2F-1203SH30	AM2F-1203SH52	12V±10%	3.3VDC	600mA
AM2F-1205S	AM2F-1205SH30	AM2F-1205SH52		5VDC	400mA
AM2F-1207S	AM2F-1207SH30	AM2F-1207SH52		7.2VDC	278mA
AM2F-1209S	AM2F-1209SH30	AM2F-1209SH52		9VDC	222mA
AM2F-1212S	AM2F-1212SH30	AM2F-1212SH52		12VDC	167mA
AM2F-1215S	AM2F-1215SH30	AM2F-1215SH52		15VDC	134mA
AM2F-1218S	AM2F-1218SH30	AM2F-1218SH52		18VDC	111mA
AM2F-1224S	AM2F-1224SH30	AM2F-1224SH52		24VDC	83mA
AM2F-2403S	AM2F-2403SH30	AM2F-2403SH52	24V±10%	3.3VDC	600mA
AM2F-2405S	AM2F-2405SH30	AM2F-2405SH52		5VDC	400mA
AM2F-2407S	AM2F-2407SH30	AM2F-2407SH52		7.2VDC	278mA
AM2F-2409S	AM2F-2409SH30	AM2F-2409SH52		9VDC	222mA
AM2F-2412S	AM2F-2412SH30	AM2F-2412SH52		12VDC	167mA
AM2F-2415S	AM2F-2415SH30	AM2F-2415SH52		15VDC	134mA
AM2F-2418S	AM2F-2418SH30	AM2F-2418SH52		18VDC	111mA
AM2F-2424S	AM2F-2424SH30	AM2F-2424SH52		24VDC	83mA