


CHOKE COILS

HBCC SERIES

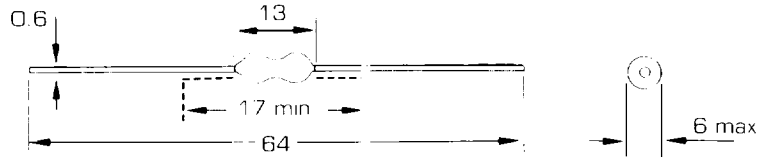

Ordering Code	Inductance L (μH)	fL (MHz)	Tol. %	Q min.	Testing Freq. (MHz)	SRF (MHz) min.	Dc-Res (Ω) max.	Rated DC Current (A)
HBCC-1R0K - **	1.0	0.02	10	40	7.96	200	0.08	2.20
HBCC-1R2K - **	1.2					185	0.09	2.15
HBCC-1R5K - **	1.5					170	0.10	2.10
HBCC-1R8K - **	1.8					155	0.10	2.00
HBCC-2R2K - **	2.2					140	0.11	1.90
HBCC-2R7K - **	2.7					130	0.12	1.80
HBCC-3R3K - **	3.3					120	0.14	1.75
HBCC-3R9K - **	3.9					110	0.15	1.70
HBCC-4R7K - **	4.7					100	0.16	1.60
HBCC-5R6K - **	5.6					90	0.17	1.55
HBCC-6R9K - **	6.8	80	0.19	1.50				
HBCC-8R2K - **	8.2	70	0.20	1.45				
HBCC-100K - **	10.0	60	0.22	1.40				
HBCC-120K - **	12.0	40	0.26	1.30				
HBCC-150K - **	15.0	20	0.30	1.25				
HBCC-180K - **	18.0	17	0.33	1.20				
HBCC-220K - **	22.0	12	0.35	1.10				
HBCC-270K - **	27.0	10	0.39	1.00				
HBCC-330K - **	33.0	8	0.43	0.90				
HBCC-390J - **	39.0	0.02	15	40	0.796	6.5	0.47	0.85
HBCC-470J - **	47.0					5.0	0.50	0.80
HBCC-560J - **	56.0					4.5	0.55	0.75
HBCC-680J - **	68.0					4.0	0.60	0.70
HBCC-820J - **	82.0					3.7	0.65	0.65
HBCC-101J - **	100.0					3.5	0.70	0.60
HBCC-121J - **	120.0					3.2	1.00	0.55
HBCC-151J - **	150.0					3.0	1.20	0.50
HBCC-181J - **	180.0					2.7	1.40	0.45
HBCC-221J - **	220.0					2.4	1.60	0.40
HBCC-271J - **	270.0	2.1	1.80	0.37				
HBCC-331J - **	330.0	1.9	2.00	0.33				
HBCC-391J - **	390.0	1.7	2.30	0.31				
HBCC-471J - **	470.0	1.50	2.5	0.28				
HBCC-561J - **	560.0	1.40	2.9	0.26				
HBCC-681J - **	680.0	1.30	3.2	0.24				
HBCC-821J - **	820.0	1.25	3.5	0.22				
HBCC-102J - **	1000.0	1.20	3.8	0.20				
HBCC-122J - **	1200.0	1.10	5.2	0.18				
HBCC-152J - **	1500.0	1.00	6.5	0.16				
HBCC-182J - **	1800.0	0.90	8.0	0.14				
HBCC-222J - **	2200.0	0.80	9.0	0.12				
HBCC-272J - **	2700.0	0.70	12.0	0.12				
HBCC-332J - **	3300.0	0.60	15.0	0.11				
HBCC-392J - **	3900.0	0.55	18.0	0.10				
HBCC-472J - **	4700.0	0.50	20.0	0.09				

Ferrite