


RFI SUPPRESSION COILS

MISC, SMSC, MESC SERIES




Approvals

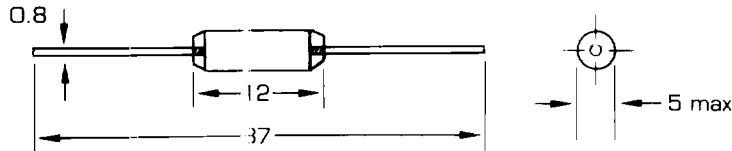

Ordering Code	Inductance L (μ H)	Tol. %	Current (A)	Resistance (m Ω)	Test Freq. (MHz)
MISC-1R0M **	1	±20	4.00	15	1.00
MISC-2R0M **	2		3.00	45	
MISC-3R0M **	3		2.00	77	
MISC-6R0M **	6		1.50	190	0.10
MISC-140M **	14		0.70	760	
MISC-300M **	30		0.40	2700	
MISC-400M **	40		0.30	4100	
MISC-101M **	100		0.15	19000	

↑ Iron Oxide
↓

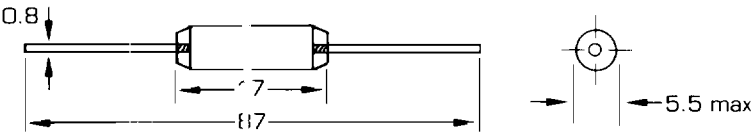


Approvals



Ordering Code	Inductance L (μ H)	Tol. %	Current (A)	Resistance (m Ω)	Test Freq. (MHz)
SMSC-1R0M **	1	±20	6.00	11	1.00
SMSC-2R0M **	2		4.00	20	
SMSC-3R0M **	3		3.00	38	
SMSC-6R0M **	6		2.00	120	0.10
SMSC-100M **	10		1.50	230	
SMSC-230M **	23		0.70	730	
SMSC-500M **	50		0.40	3000	
SMSC-700M **	70		0.35	4500	
SMSC-161M **	160		0.15	18000	

↑ Iron Oxide
↓

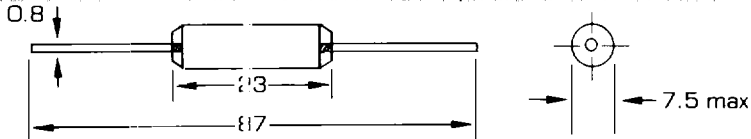

Approvals



Ordering Code	Inductance L (μ H)	Tol. %	Current (A)	Resistance (m Ω)	Test Freq. (MHz)
MESC-3R0M **	3	±20	6.00	18	1.00
MESC-5R0M **	5		4.00	34	
MESC-100M **	10		3.00	87	
MESC-150M **	15		2.00	165	0.10
MESC-250M **	25		1.50	340	
MESC-550M **	55		0.70	1300	
MESC-131M **	130		0.40	4800	
MESC-161M **	160		0.30	6600	
MESC-351M **	350		0.15	19000	
MESC-7R0M **	7		6.00	20	0.10
MESC-120M **	12	4.00	40		
MESC-220M **	22	3.00	70		
MESC-400M **	40	2.00	180		
MESC-560M **	56	1.50	300		
MESC-101M **	100	1.00	650		
MESC-221M **	220	0.50	2600		
MESC-471M **	470	0.30	6500		
MESC-681M **	680	0.20	14000		
MESC-122M **	1200	0.10	34000		
MESC-152M **	1500	0.08	54000		

↑ Iron Oxide
↓ Ferrite