3.5x2.8mm SURFACE MOUNT LED LAMP

Part Number: AA3528SYSK/J3

Super Bright Yellow


Features

- Single color.
- Suitable for all SMT assembly and solder process.
- Available on tape and reel.
- Ideal for backlighting.
- Package : 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

The Super Bright Yellow device is based on light emitting diode chip made from AlGaInP.

Package Dimensions

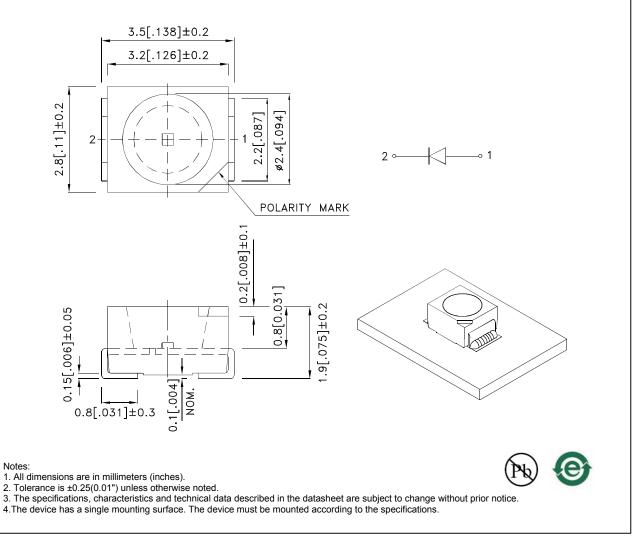


REV NO: V.1B CHECKED: Allen Liu DATE: SEP/23/2013 DRAWN: Y.Liu PAGE: 1 OF 6 ERP: 1201008685


Handling Precautions


Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force. As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.

1. Handle the component along the side surfaces by using forceps or appropriate tools.




2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.






3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



- 4.1. The inner diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks.
- 4.2. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
- 4.3. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



5. As silicone encapsulation is permeable to gases, some corrosive substances such as H_2S might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

Selection Guide

Selection Guide					
Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
AA3528SYSK/J3	Super Bright Yellow (AlGaInP)	Water Clear	200	450	120°

Notes:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

Luminous intensity/ luminous Flux: +/-15%.
Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C


Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Super Bright Yellow	590		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Super Bright Yellow	590		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Super Bright Yellow	20		nm	I⊧=20mA
С	Capacitance	Super Bright Yellow	45		pF	VF=0V;f=1MHz
Vf [2]	Forward Voltage	Super Bright Yellow	2	2.5	V	l⊧=20mA
IR	Reverse Current	Super Bright Yellow		10	uA	VR=5V

Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V. 3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

Absolute Maximum Ratings at TA=25°C

Parameter	Super Bright Yellow	Units		
Power dissipation	125	mW		
DC Forward Current	50	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating Temperature	-40°C To +85°C			
Storage Temperature	-40°C To +85°C			


Note: 1. 1/10 Duty Cycle, 0.1ms Pulse Width.

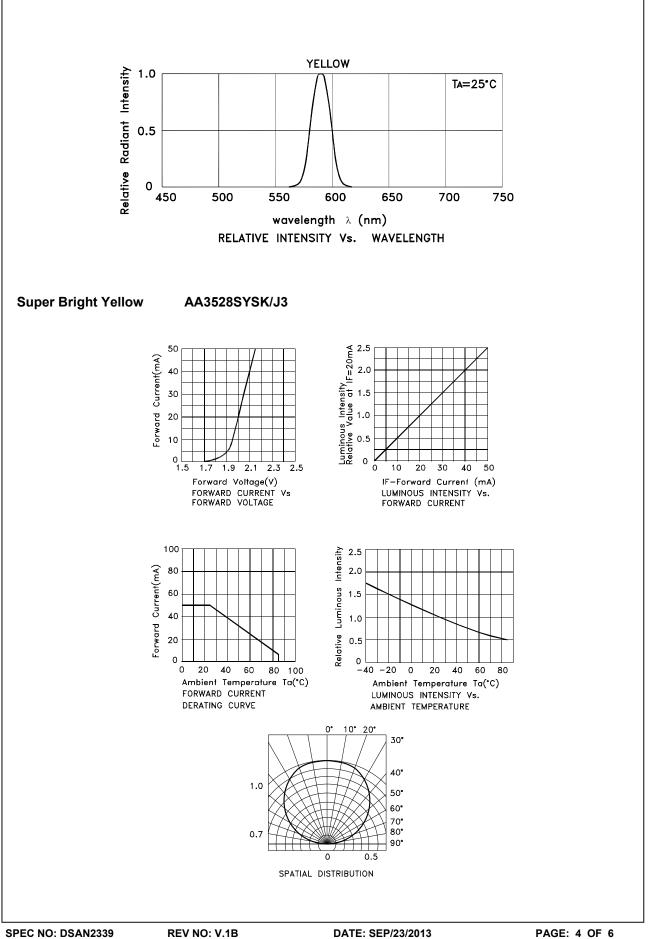

AA3528SYSK/J3

Reflow soldering is recommended and the soldering profile is shown below. Other soldering methods are not recommended as they might cause damage to the product.


Reflow Soldering Profile For Lead-free SMT Process.





NOTES: 1.We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C. 2.Don't cause stress to the epoxy resin while it is exposed to high temperature. 3.Number of reflow process shall be 2 times or less.



Reel Dimension





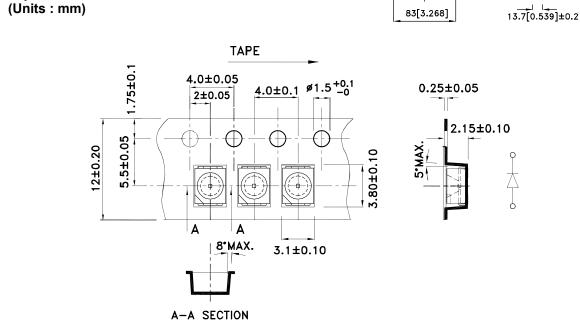


Tape Dimensions

REV NO: V.1B CHECKED: Allen Liu

DATE: SEP/23/2013 DRAWN: Y.Liu

PAGE: 5 OF 6 ERP: 1201008685

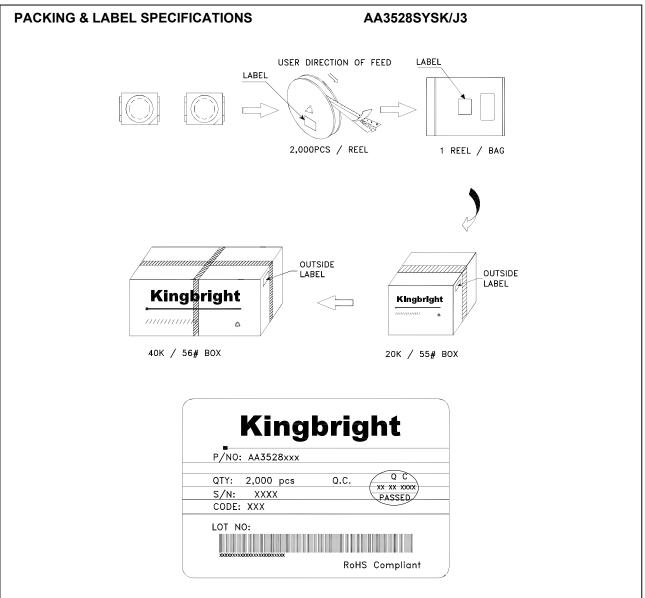

Terms and conditions for the usage of this document

- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3.When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.

6.All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes