

Amphenol®



Amphenol AT® Circular Connector featuring AT Contact Technology

Amphenol Industrial Operations introduces a series of plastic receptacles featuring Amphenol's AT contact technology. This series is designed to perform in the demanding environment found on construction and farm equipment as well as truck environment. The AT Circular series is a molded thermoplastic receptacle with a positive reverse bayonet retention system and sealed by redundant grommet wire sealing. The square flange design ensures a drop in replacement to existing panel design and the jam nut design makes for easy installation. The 9 pin black receptacles are in accordance to the interface of the diagnostic connector of J1939/13.

The AT Contact technology is already used successfully at major OEM's and features machined contacts with both Nickel and Gold plating.

Features:

- Jam nut and square flange mounting styles solution.
- Quick mating and unmating - reverse bayonet coupling.
- Environmentally sealed - sealed against moisture and contaminants.
- Contact retention system decreases installation costs and increases reliability.
- RoHs compliant product.
- Heavy-duty industrial connector, economical connector selection.

Material Specifications

| | |
|---------------------------------------|---|
| Receptacle Square Flange Grommet Seal | Thermoplastic Neoprene Rubber for 3 and 5 pin Silicone Rubber for 9 pin |
| Contact (AT Series) | Copper Alloy (Nickel and Gold plating available) |

Electrical Specifications based on AT Machined

| | |
|--|---|
| Dielectric Withstanding Voltage (Test Voltage) | Current leakage less than 2 milliamps at 1500 VAC |
| Current Rating at 125 degree C | 13 A |
| Contact Millivolt Drop | 60 (AWG 16 Wire, 13 A) |
| Insulation Resistance | 1000 megaohms min. at 25°C |

Mechanical Specifications

| | |
|-----------------------------|--|
| Operating Temperature Range | -55°C to +125°C |
| Durability (Mating Cycle) | No electrical or mechanical defects after 100 cycles of engagement or disengagement |
| Corrosion Resistance | Connectors show no evidence of corrosion after exposure to 48 hours of salt spray per MIL STD 1344 method 1001 |
| Moisture Resistance | Water does not penetrate seals when submerged in 3 feet of water |
| Fluid Resistance | Connectors show no damage when exposed to most fluids used in industrial applications |
| Thermal Shock | -40°/+125°C, 100 cycles, 1 hour per cycle |
| Crimp Tensile Strength | 25 lbs |
| Vibration | Maintains continuity and exhibits no mechanical or physical damage during or while subject to sinusoidal vibration, having an amplitude of .060 inches double amplitude and the frequency varied linearly between limits of 10 to 2000 to 10 Hz with a maximum force of 20g's. No electrical discontinuities longer than 1 microsecond |
| Physical Shock | No unlocking, unmating or other unsatisfactory result during or after 50 g's in each of three mutually perpendicular planes. No electrical discontinuities longer than 1 microsecond. MIL STD 202, Method 213, Condition "C" |

How to Order


Connectors

| | | | | | |
|--|----|---|--------|---|---|
| ATC | 10 | - | 9-1939 | P | N |
| 1 | 2 | | 3 | 4 | |
| 1 designates AT Circular Connector | | | | | |
| 2 Shell Style | | | | | |
| 10 = Square Flange Receptacle | | | | | |
| 17 = Jam Nut Receptacle | | | | | |
| 11 = Round Net Receptacle | | | | | |
| 3 Shell Sizes and Insert Arrangements | | | | | |
| 3, 5, 9-1939 | | | | | |
| 4 Contact | | | | | |
| P for Pin (only available for Receptacles) | | | | | |


Accessories

| Part Numbers | Description |
|--------------|--|
| ATC10-RC3C | Cap with Lanyard for Size 3 Square Flange Receptacle |
| ATC10-RC3 | Cap less Lanyard for Size 3 Receptacle |
| ATC10-RC5C | Cap with Lanyard for Size 5 Square Flange Receptacle |
| ATC10-RC5 | Cap less Lanyard for Size 5 Receptacle |
| ATC10-RC9C | Cap with Lanyard for Size 9 Square Flange Receptacle |
| ATC10-RC9 | Cap less Lanyard for Size 9 Receptacle |
| ATC10-RC9L | Cap with Lanyard for Size 9 Jam nut Receptacle |
| ALHN-9 | Hex Nut for Size 9 Jam nut receptacle |


Part Dimensions for ATC-10-3PN

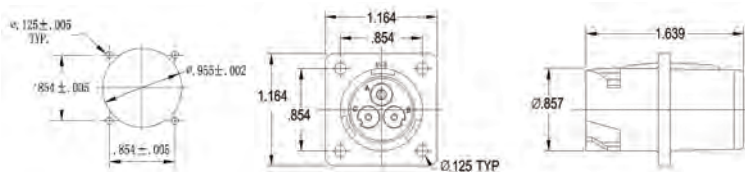


Part Dimensions for ATC-10-5PN

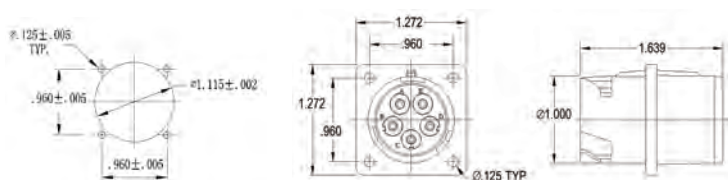


Part Dimensions for ATC-11-9-1939PN

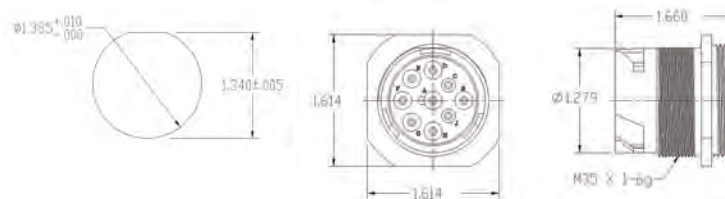

Part Dimensions for ATC-17-9-1939PN

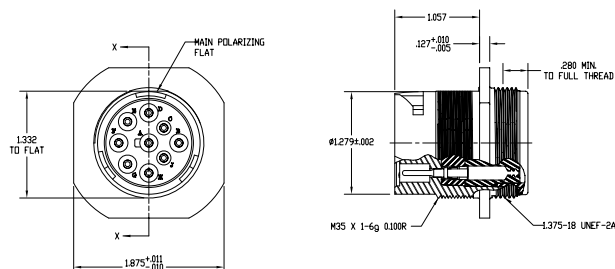

Part Dimensions for ATC-10-9-1939PN

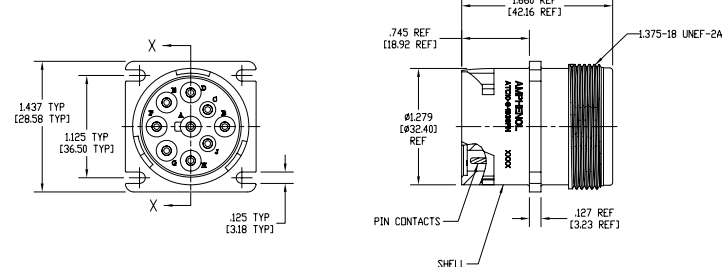

• For Crimp Information please contact factory

The information contained on this data sheet is for reference only.

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

For further information on your individual application requirements, contact: Amphenol Corporation

North America:
Amphenol Industrial Operations
180 N. Freepoint Drive, Plant 4
Nogales, AZ 85621
Tel: (520) 285-5130
Fax: (520) 285-5134
Email: rpdrizzini@amphenol-aio.com

Europe:
Amphenol Industrial Operations Europe
Via Barbaiana 5
1-20020 Lainate (MI) Italy
Tel: +39 02 93254.204
Fax: +39 02 93254.444
Email: info@amphenol-aio.com

Middle East:
Amphenol Middle East Enterprises FZE
Office C-37 PO Box 21107
Ajman Free Zone, UAE
Tel: +9716-7422494
Fax: +9716-7422941
Email: ameezfe@eim.ae

Asia:
Amphenol Technology Shenzhen Ltd
Block 5 Fuan 2nd Industrial Park
Dayang Rd, Fuyong Baoan
Baoan, Shenzhen, China 518103
Tel: +86 755 2881 8389
Fax: +86 755 2991 8310
Email: yb.zhu@amphenol-industrial.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[ATC17-9-1939PN](#) [ATC10-5PN](#) [ATC10-RC9L](#) [ATC10-RC5C](#) [ATC10-RC5](#) [ATC10-3PN](#) [ATC10-RC3](#) [ATC10-RC9](#)
[ATC10-RC3C](#) [ATC10-9-1939PN](#)