




**Advanced Power  
Electronics Corp.**

**AP4232GM**

**Pb Free Plating Product**

*N-CHANNEL ENHANCEMENT MODE  
POWER MOSFET*


- ▼ Low On-Resistance
- ▼ Simple Drive Requirement
- ▼ Dual N MOSFET Package



|              |              |
|--------------|--------------|
| $BV_{DSS}$   | 30V          |
| $R_{DS(ON)}$ | 22m $\Omega$ |
| $I_D$        | 7.8A         |

## Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, ultra low on-resistance and cost-effectiveness.

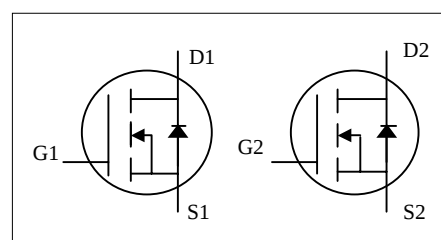

## Absolute Maximum Ratings

| Symbol                     | Parameter                             | Rating     | Units               |
|----------------------------|---------------------------------------|------------|---------------------|
| $V_{DS}$                   | Drain-Source Voltage                  | 30         | V                   |
| $V_{GS}$                   | Gate-Source Voltage                   | $\pm 20$   | V                   |
| $I_D@T_A=25^\circ\text{C}$ | Continuous Drain Current <sup>3</sup> | 7.8        | A                   |
| $I_D@T_A=70^\circ\text{C}$ | Continuous Drain Current <sup>3</sup> | 6.2        | A                   |
| $I_{DM}$                   | Pulsed Drain Current <sup>1</sup>     | 30         | A                   |
| $P_D@T_A=25^\circ\text{C}$ | Total Power Dissipation               | 2          | W                   |
|                            | Linear Derating Factor                | 0.016      | W/ $^\circ\text{C}$ |
| $T_{STG}$                  | Storage Temperature Range             | -55 to 150 | $^\circ\text{C}$    |
| $T_J$                      | Operating Junction Temperature Range  | -55 to 150 | $^\circ\text{C}$    |

## Thermal Data

| Symbol      | Parameter                                             | Value | Unit                      |
|-------------|-------------------------------------------------------|-------|---------------------------|
| $R_{thj-a}$ | Thermal Resistance Junction-ambient <sup>3</sup> Max. | 62.5  | $^\circ\text{C}/\text{W}$ |



## AP4232GM

### Electrical Characteristics@T<sub>j</sub>=25°C(unless otherwise specified)

| Symbol                              | Parameter                                           | Test Conditions                                          | Min. | Typ. | Max. | Units |
|-------------------------------------|-----------------------------------------------------|----------------------------------------------------------|------|------|------|-------|
| BV <sub>DSS</sub>                   | Drain-Source Breakdown Voltage                      | V <sub>GS</sub> =0V, I <sub>D</sub> =250uA               | 30   | -    | -    | V     |
| ΔBV <sub>DSS</sub> /ΔT <sub>j</sub> | Breakdown Voltage Temperature Coefficient           | Reference to 25°C, I <sub>D</sub> =1mA                   | -    | 0.02 | -    | V/°C  |
| R <sub>DS(ON)</sub>                 | Static Drain-Source On-Resistance <sup>2</sup>      | V <sub>GS</sub> =10V, I <sub>D</sub> =7A                 | -    | -    | 22   | mΩ    |
|                                     |                                                     | V <sub>GS</sub> =4.5V, I <sub>D</sub> =5A                | -    | -    | 32   | mΩ    |
| V <sub>GS(th)</sub>                 | Gate Threshold Voltage                              | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> =250uA | 1    | -    | 3    | V     |
| g <sub>fs</sub>                     | Forward Transconductance                            | V <sub>DS</sub> =10V, I <sub>D</sub> =7A                 | -    | 12   | -    | S     |
| I <sub>DSS</sub>                    | Drain-Source Leakage Current (T <sub>j</sub> =25°C) | V <sub>DS</sub> =30V, V <sub>GS</sub> =0V                | -    | -    | 1    | uA    |
|                                     | Drain-Source Leakage Current (T <sub>j</sub> =70°C) | V <sub>DS</sub> =24V, V <sub>GS</sub> =0V                | -    | -    | 25   | uA    |
| I <sub>GSS</sub>                    | Gate-Source Leakage                                 | V <sub>GS</sub> =±20V                                    | -    | -    | ±100 | nA    |
| Q <sub>g</sub>                      | Total Gate Charge <sup>2</sup>                      | I <sub>D</sub> =7A                                       | -    | 13   | 21   | nC    |
| Q <sub>gs</sub>                     | Gate-Source Charge                                  | V <sub>DS</sub> =24V                                     | -    | 3    | -    | nC    |
| Q <sub>gd</sub>                     | Gate-Drain ("Miller") Charge                        | V <sub>GS</sub> =4.5V                                    | -    | 9    | -    | nC    |
| t <sub>d(on)</sub>                  | Turn-on Delay Time <sup>2</sup>                     | V <sub>DS</sub> =15V                                     | -    | 10   | -    | ns    |
| t <sub>r</sub>                      | Rise Time                                           | I <sub>D</sub> =1A                                       | -    | 7    | -    | ns    |
| t <sub>d(off)</sub>                 | Turn-off Delay Time                                 | R <sub>G</sub> =3.3Ω, V <sub>GS</sub> =10V               | -    | 22   | -    | ns    |
| t <sub>f</sub>                      | Fall Time                                           | R <sub>D</sub> =15Ω                                      | -    | 8    | -    | ns    |
| C <sub>iss</sub>                    | Input Capacitance                                   | V <sub>GS</sub> =0V                                      | -    | 720  | 1150 | pF    |
| C <sub>oss</sub>                    | Output Capacitance                                  | V <sub>DS</sub> =25V                                     | -    | 230  | -    | pF    |
| C <sub>rss</sub>                    | Reverse Transfer Capacitance                        | f=1.0MHz                                                 | -    | 200  | -    | pF    |
| R <sub>g</sub>                      | Gate Resistance                                     | f=1.0MHz                                                 | -    | 1.2  | 1.8  | Ω     |

### Source-Drain Diode

| Symbol          | Parameter                          | Test Conditions                           | Min. | Typ. | Max. | Units |
|-----------------|------------------------------------|-------------------------------------------|------|------|------|-------|
| V <sub>SD</sub> | Forward On Voltage <sup>2</sup>    | I <sub>S</sub> =1.7A, V <sub>GS</sub> =0V | -    | -    | 1.2  | V     |
| t <sub>rr</sub> | Reverse Recovery Time <sup>2</sup> | I <sub>S</sub> =7A, V <sub>GS</sub> =0V,  | -    | 16   | -    | ns    |
| Q <sub>rr</sub> | Reverse Recovery Charge            | dI/dt=100A/μs                             | -    | 8    | -    | nC    |

#### Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse width ≤300us , duty cycle ≤2%.
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board, t ≤10sec ; 135 °C/W when mounted on Min. copper pad.

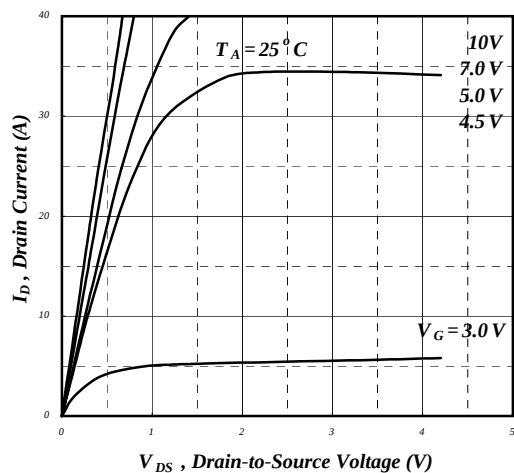


Fig 1. Typical Output Characteristics

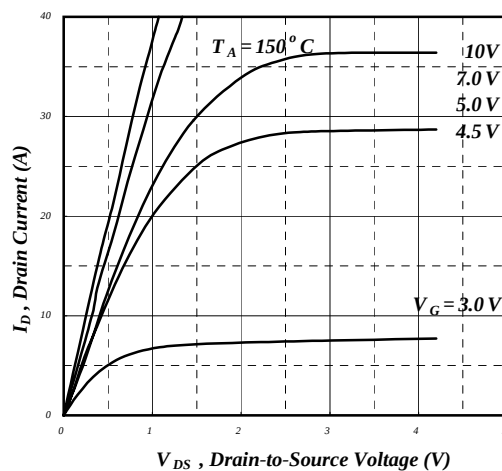


Fig 2. Typical Output Characteristics

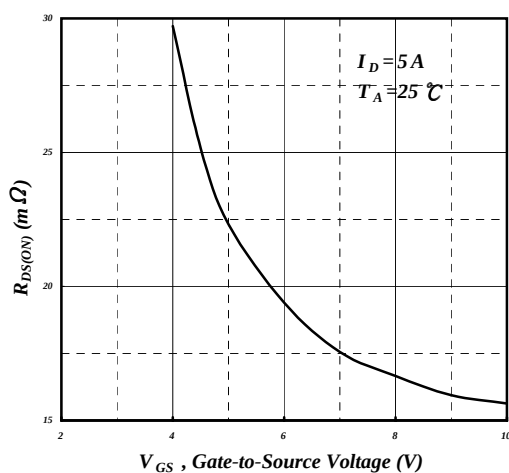


Fig 3. On-Resistance v.s. Gate Voltage

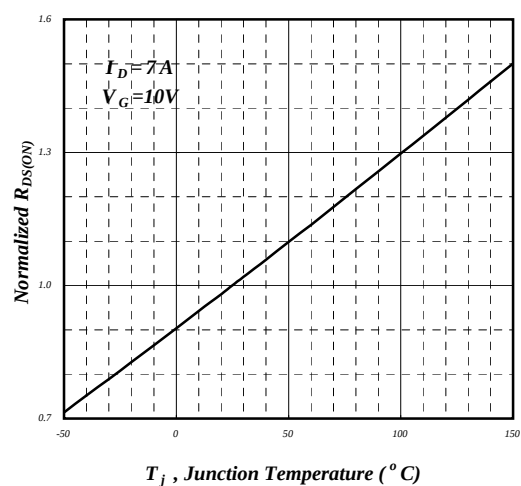


Fig 4. Normalized On-Resistance v.s. Junction Temperature

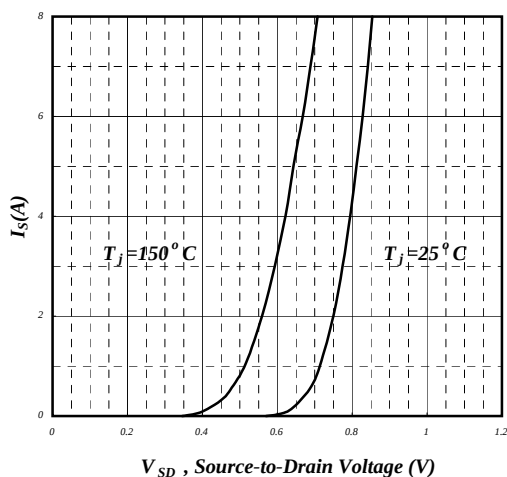


Fig 5. Forward Characteristic of Reverse Diode

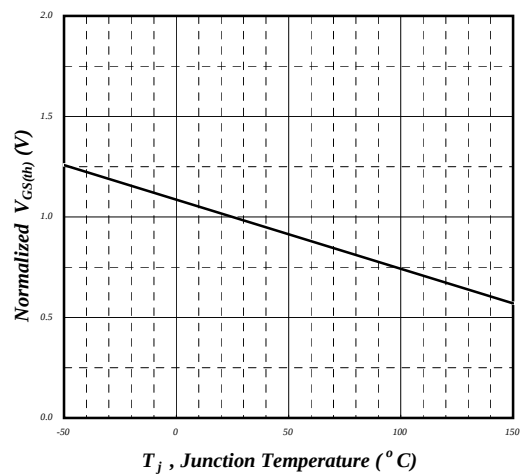


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

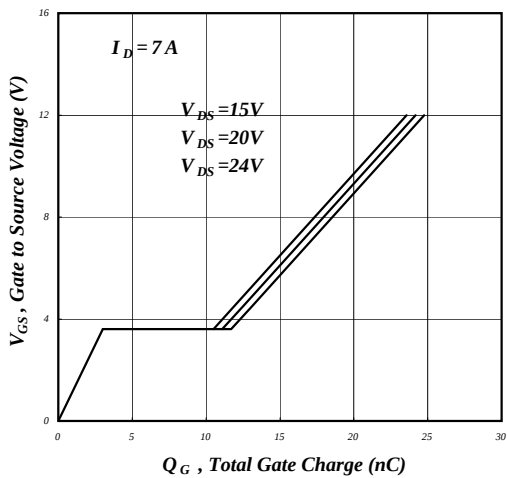


Fig 7. Gate Charge Characteristics

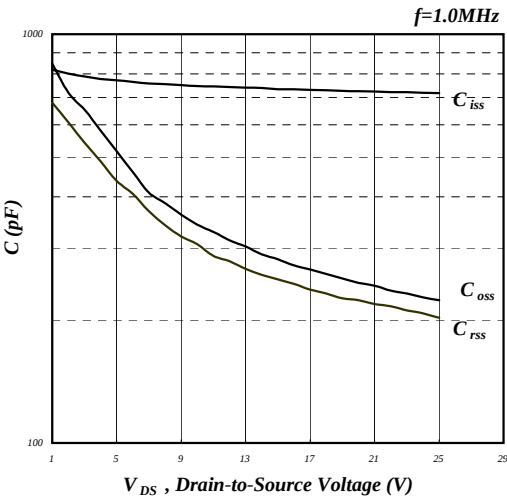


Fig 8. Typical Capacitance Characteristics

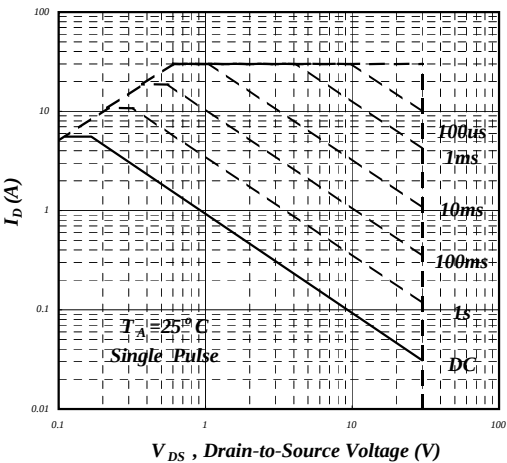


Fig 9. Maximum Safe Operating Area

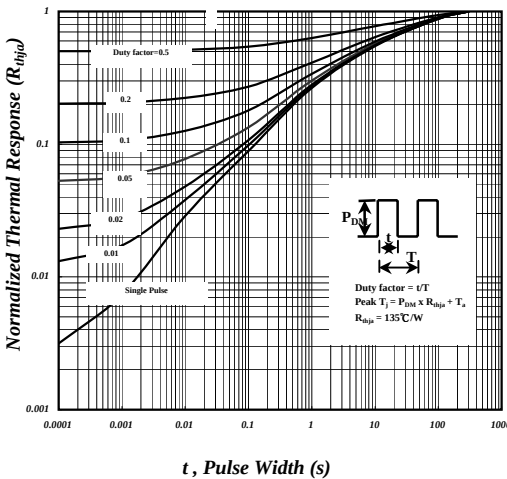


Fig 10. Effective Transient Thermal Impedance

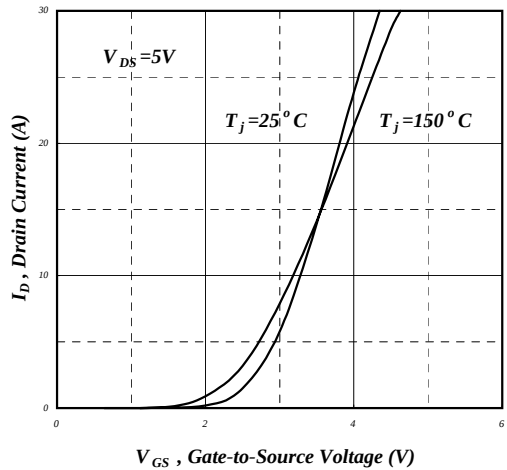


Fig 11. Transfer Characteristics

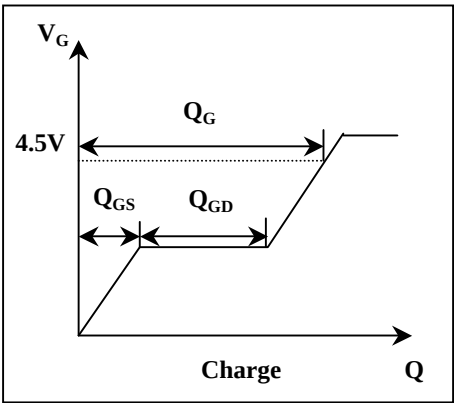


Fig 12. Gate Charge Waveform