

HFM101-M THRU HFM107-M


Ultra fast recovery type

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound.
- For surface mounted applications.
- Exceeds environmental standards of MIL-S-19500 / 228
- Low leakage current

Mechanical data

Case : Molded plastic, JEDEC SOD-123 / MINISMA
 Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity : Indicated by cathode band
 Mounting Position : Any
 Weight : 0.04 gram

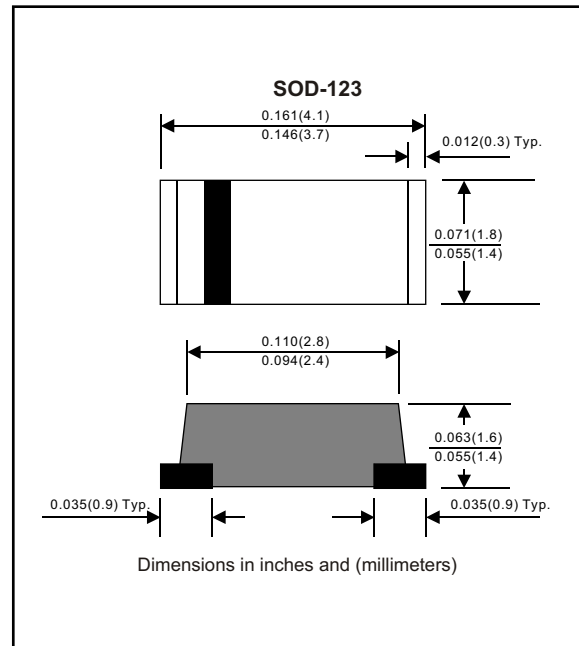

MAXIMUM RATINGS (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

| PARAMETER | CONDITIONS | Symbol | MIN. | TYP. | MAX. | UNIT |
|----------------------------|---|-----------|------|------|------|-------------------------------|
| Forward rectified current | Ambient temperature = 50°C | I_O | | | 1.0 | A |
| Forward surge current | 8.3ms single half sine-wave superimposed on rate load (JEDEC methode) | I_{FSM} | | | 30 | A |
| Reverse current | $V_R = V_{RRM}$ $T_A = 25^{\circ}\text{C}$ | I_R | | | 5.0 | μA |
| | $V_R = V_{RRM}$ $T_A = 100^{\circ}\text{C}$ | | | | 150 | μA |
| Thermal resistance | Junction to ambient | R_{QJA} | | 42 | | $^{\circ}\text{C} / \text{w}$ |
| Diode junction capacitance | f=1MHz and applied 4vDC reverse voltage | C_J | | 20 | | pF |
| Storage temperature | | T_{STG} | -55 | | +150 | $^{\circ}\text{C}$ |

| SYMBOLS | MARKING CODE | V_{RRM}^{*1} (V) | V_{RMS}^{*2} (V) | V_R^{*3} (V) | V_F^{*4} (V) | T_{RR}^{*5} (nS) | Operating temperature ($^{\circ}\text{C}$) |
|----------|--------------|-----------------------|-----------------------|-------------------|-------------------|-----------------------|---|
| HFM101-M | H1 | 50 | 35 | 50 | 1.0 | 50 | -55 to +150 |
| HFM102-M | H2 | 100 | 70 | 100 | | | |
| HFM103-M | H3 | 200 | 140 | 200 | | | |
| HFM104-M | H4 | 300 | 210 | 300 | 1.3 | 75 | |
| HFM105-M | H5 | 400 | 280 | 400 | | | |
| HFM106-M | H6 | 600 | 420 | 600 | 1.7 | 75 | |
| HFM107-M | H7 | 800 | 560 | 800 | | | |

- *1 Repetitive peak reverse voltage
- *2 RMS voltage
- *3 Continuous reverse voltage
- *4 Maximum forward voltage
- *5 Reverse recovery time

RATING AND CHARACTERISTIC CURVES (HFM101-M THRU HFM107-M)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

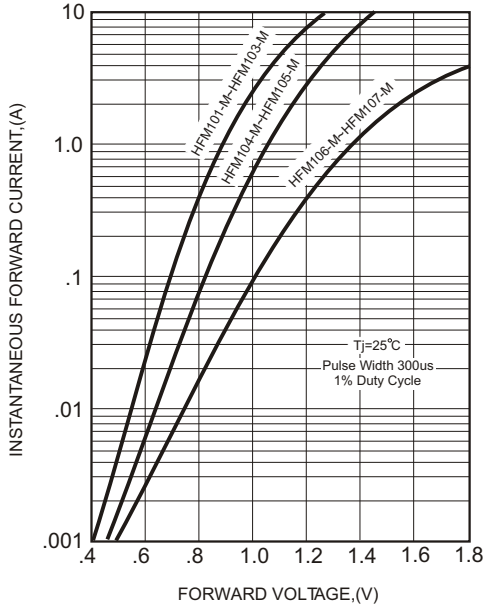


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


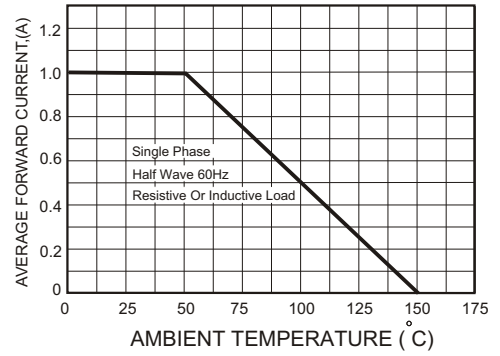


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

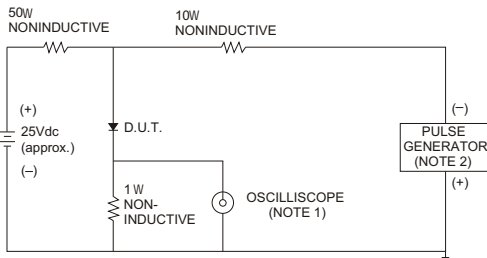

- NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

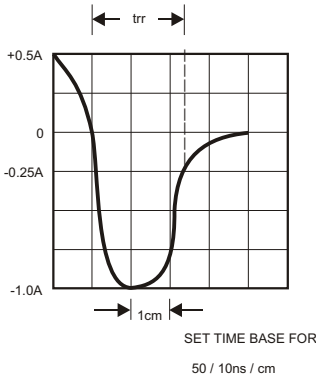


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

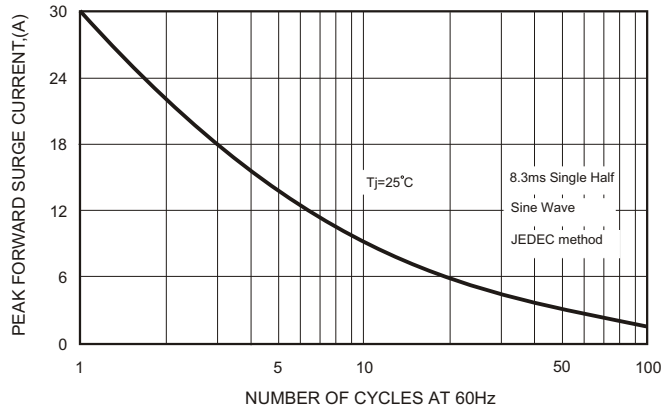


FIG.5-TYPICAL JUNCTION CAPACITANCE

