



**ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
DISCHARGE  
SENSITIVE  
DEVICES

Part Number: AAAF5060QBFSURZGS

Blue  
Hyper Red  
Green

### Features

- Chips can be controlled separately.
- Suitable for all SMT assembly and solder process.
- Available on tape and reel.
- Package: 500pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

### Description

The Blue source color devices are made with InGaN Light Emitting Diode.

The Hyper Red source color devices are made with Al-GaN on GaAs substrate Light Emitting Diode.


The Green source color devices are made with InGaN on Sapphire Light Emitting Diode.

Static electricity and surge damage the LEDs.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

### Package Dimensions

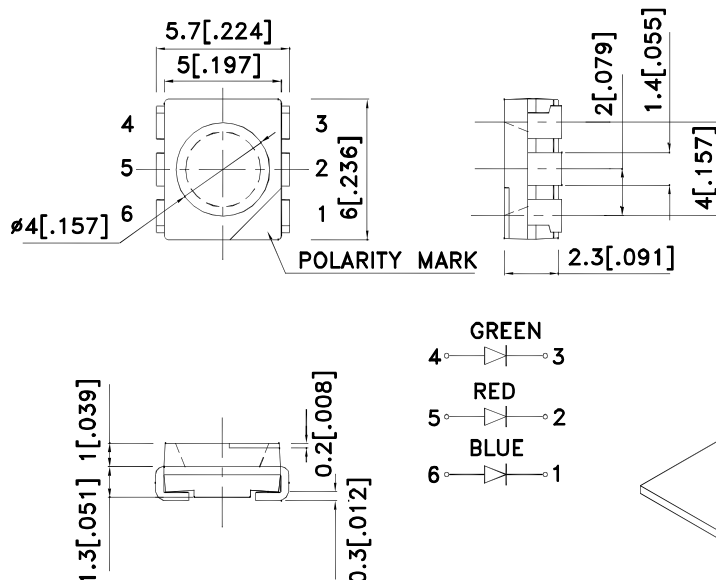

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.




## Handling Precautions



Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


1. Handle the component along the side surfaces by using forceps or appropriate tools.




2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry.



3. Do not stack together assembled PCBs containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry.



4. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible.
5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup.
6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production.



## Selection Guide

| Part No.          | Dice                | Lens Type   | Iv (mcd) [2]<br>@ 30mA *50mA |      | Viewing<br>Angle [1] |
|-------------------|---------------------|-------------|------------------------------|------|----------------------|
|                   |                     |             | Min.                         | Typ. | 2θ1/2                |
| AAAF5060QBFSURZGS | Blue (InGaN)        | Water Clear | 280                          | 400  | 100°                 |
|                   | Hyper Red (AlGaInP) |             | *500                         | *800 |                      |
|                   | Green (InGaN)       |             | 500                          | 1000 |                      |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. \*Luminous intensity with asterisk is measured at 50mA; Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol             | Parameter                | Device                     | Typ.              | Max.            | Units | Test Conditions           |
|--------------------|--------------------------|----------------------------|-------------------|-----------------|-------|---------------------------|
| λ <sub>peak</sub>  | Peak Wavelength          | Blue<br>Hyper Red<br>Green | 461<br>650<br>515 |                 | nm    | I <sub>F</sub> =20mA      |
| λ <sub>D</sub> [1] | Dominant Wavelength      | Blue<br>Hyper Red<br>Green | 465<br>630<br>525 |                 | nm    | I <sub>F</sub> =20mA      |
| Δλ <sub>1/2</sub>  | Spectral Line Half-width | Blue<br>Hyper Red<br>Green | 25<br>27<br>30    |                 | nm    | I <sub>F</sub> =20mA      |
| C                  | Capacitance              | Blue<br>Hyper Red<br>Green | 100<br>45<br>45   |                 | pF    | V <sub>F</sub> =0V;f=1MHz |
| V <sub>F</sub> [2] | Forward Voltage          | Blue<br>Hyper Red<br>Green | 3.3<br>1.9<br>3.3 | 4<br>2.5<br>4.1 | V     | I <sub>F</sub> =20mA      |
| I <sub>R</sub>     | Reverse Current          | Blue<br>Hyper Red<br>Green |                   | 50<br>10<br>50  | uA    | V <sub>R</sub> =5V        |

Notes:


- 1.Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

## Absolute Maximum Ratings at TA=25°C






| Parameter                | Blue           | Hyper Red | Green | Units |
|--------------------------|----------------|-----------|-------|-------|
| Power dissipation[2]     | 350            |           |       | mW    |
| DC Forward Current       | 30             | 50        | 30    | mA    |
| Peak Forward Current [1] | 150            | 185       | 150   | mA    |
| Reverse Voltage          | 5              |           |       | V     |
| Operating Temperature    | -40°C To +85°C |           |       |       |
| Storage Temperature      | -40°C To +85°C |           |       |       |

Notes:






1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. Within 350mW at all chips are lightened.

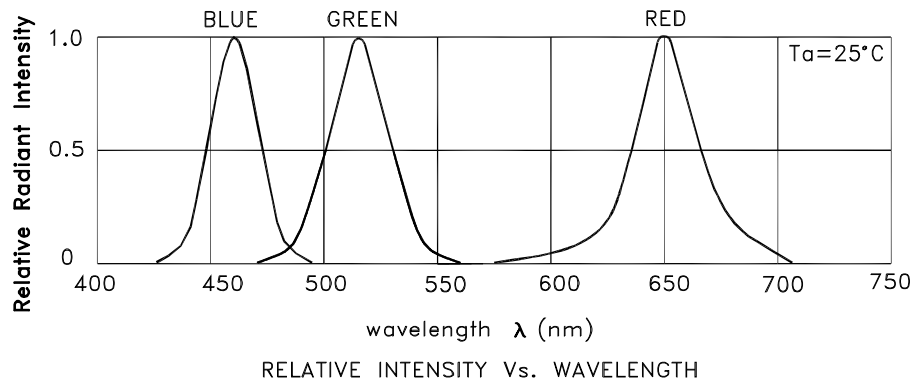






## AAAF5060QBFSURZGS Blue

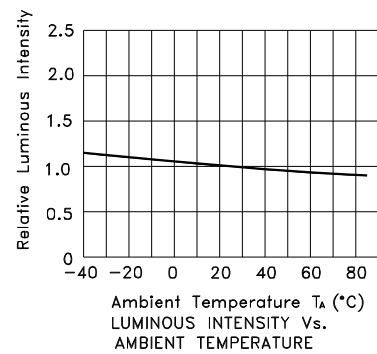

## Hyper Red

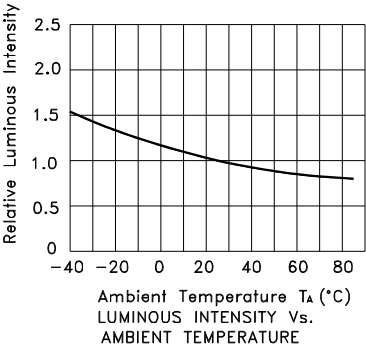


## Green

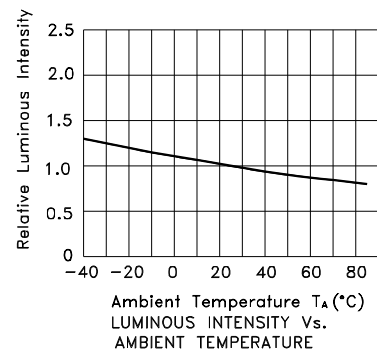

## AAAF5060QBFSURZGS

Reflow soldering is recommended and the soldering profile is shown below.  
Other soldering methods are not recommended as they might cause damage to the product.


Reflow Soldering Profile For Lead-free SMT Process.

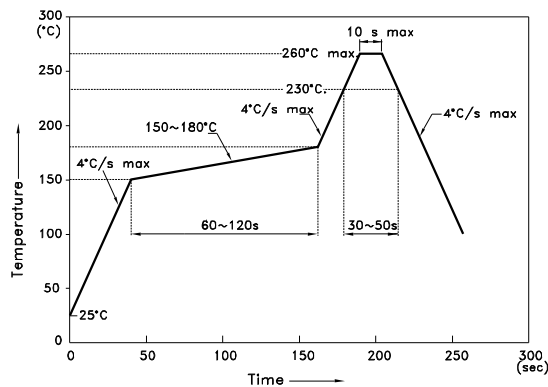


### NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


### Recommended Soldering Pattern (Units : mm; Tolerance: $\pm 0.1$ )

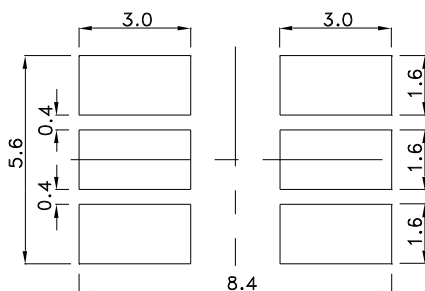

### Reel Dimension

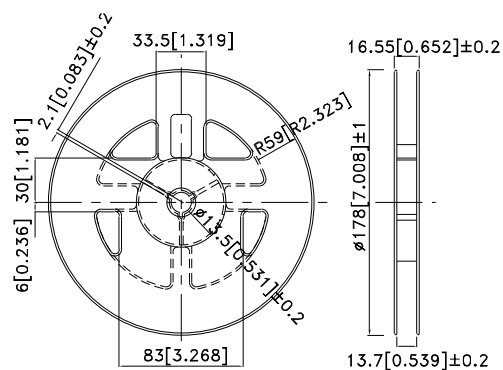



### Tape Dimensions (Units : mm)

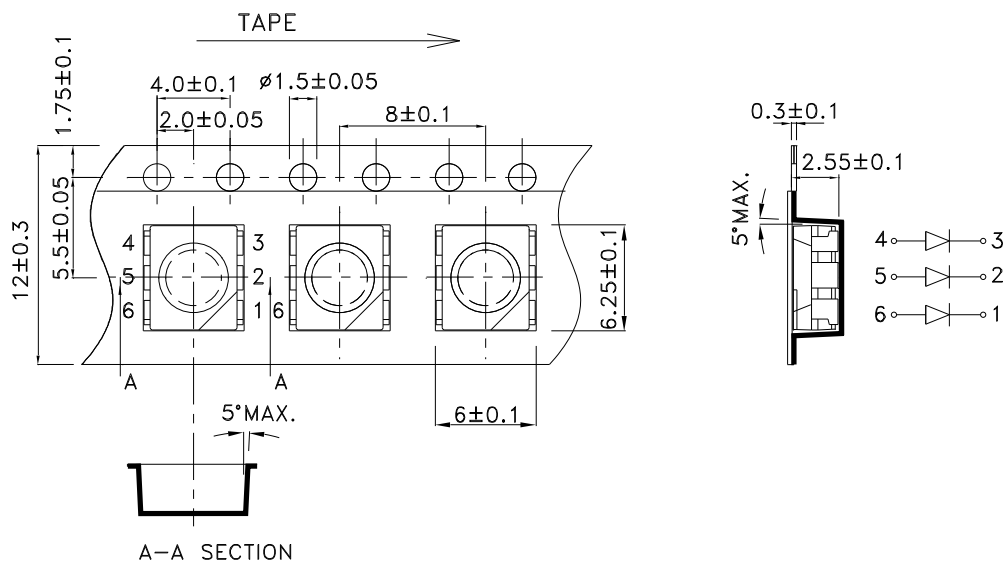

## PACKING & LABEL SPECIFICATIONS

AAAF5060QBFSURZGS

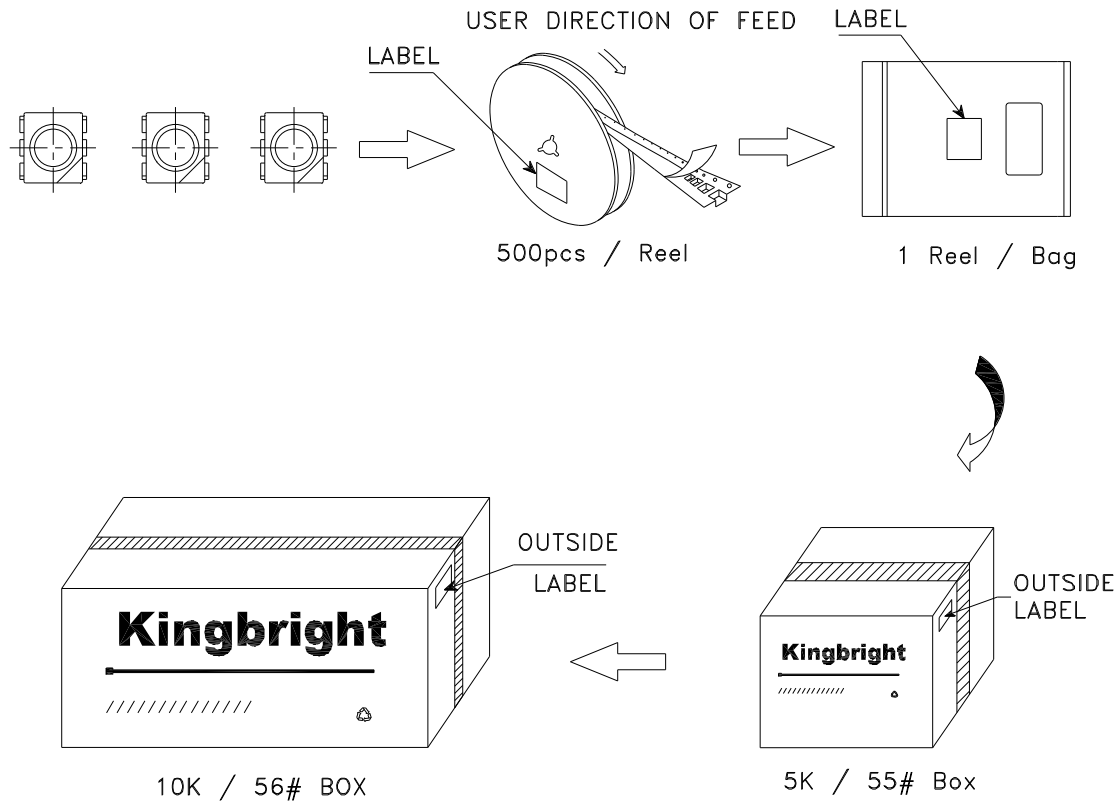

|  |                             |
|--|-----------------------------|
| <b>Kingbright</b>  |                             |
| P/NO: AAAF5060xxx  |                             |
| QTY: 500 pcs   | Q.C.                        |
| S/N: XXXX  | Q C<br>xx xx xxxx<br>PASSED |
| CODE: XXX  |                             |
| LOT NO:  |                             |
| <br>xxxxxxxxxxxxxxxxxxxxxxxxxxxx |                             |
| RoHS Compliant   |                             |



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kingbright:](#)

[AAAF5060QBFSURZGS](#)