





200 SERIES, HEAVY DUTY, 600 V, 0.50" PITCH



CHARACTERISTICS	STRAP SCREW	STRAP CLAMP	TUBULAR SCREW	TUBULAR CLAMP
Type of Block	Model	Model	Model	Model
Direct Mount (Flat Base)				
Nylon, Unpainted	241	248	242	243
Polypropylene	P241	P248	P242	P243
Channel Mount (Dovetail Base)				
Nylon, Painted	0241	0248	0242	0243
Polypropylene	P0241	P0248	P0242	P0243-BU
Contact Type				



Specifications

Wire Range (AWG)				
Solid & Stranded	22-10	18-8	18-4	18-6
Wire Strip Length (in.)	—	1/2	1/2	1/2
Screw Type	10-32 slotted binding head	8-32 pan head	1/4-28 slotted headless	1/4-28 slotted headless
Ampacity	35 A	50 A	85 A	65 A

End Sections

Direct Mount, Nylon	250	250	250	250
Direct Mount, Polypropylene	P250	P250	P250	P250
Channel Mount, Nylon	0250	0250	0250	0250
Channel Mount, Polypropylene	P0250	P0250	P0250	P0250

NOTE: Standard packaging is 40 pieces for contact and 25 pieces for end sections.

NOTES:

For factory assembled blocks, suffix Catalog Number with number of blocks desired. (Maximum number of flat base preassembled sections is 12).
Example: Ten tubular clamp, dovetail based sections, preassembled on channel = 024310

Example: Twelve polypropylene strap clamp flat base sections = P24812

For unpainted factory assembled blocks supplied with a removable marking strip add — 1 to Catalog Number.

For blocks with two or more different contact sections, imprinted marking strips, or special features, consult the Technical Support Center.

Available in special high temperature (70°C) polytherimide material. To order, suffix Catalog Number with letters "EHT".

Comparison (Type of Block)



Direct Mount
(Flat Base)



Channel Mount
(Dovetail Base)




LR25557



E63810

200 SERIES, HEAVY DUTY, 600 V, 0.50" PITCH (Continued)

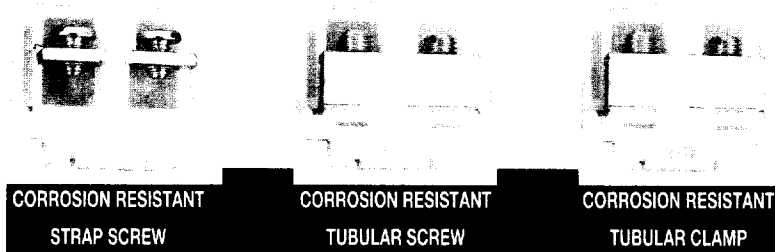

Model	Model	Model
D241	D242	D243
DP241	DP242	DP243
D0241	D0242	D0243
DP0241	DP0242	DP0243



22-10	18-4	18-4
—	1/2	1/2
10-32 Nickel plated Slotted Binding Head	1/4-28 Nickel plated Slotted Headless	1/4-28 Nickel plated Slotted Headless
35 A	85 A	65 A
250	250	250
P250	P250	P250
0250	0250	0250
P0250	P0250	P0250

NOTE: Standard packaging is 40 pieces for contact and 25 pieces for end sections.

NEMA Terminal Blocks