

μCom-10Gb +

Harsh Environment 10Gb
Ethernet Micro Connectors



μCom-Series is a new range of connectors designed to address the latest trends of the industry : **miniaturization** and **high speed**, with the highest resistance for use in the **harshest environments**.

μCom-10Gb + is the first product of this new range.

MAIN FEATURES

- 10Gb+ exceeds 10Gb/s Ethernet following IEEE 802.3an-2006 : **10GBase-T**
- Cat.6A connector according to TIA568C.2 and ISO/IEC11801 standard
- Environmental testing based on **MIL-DTL-38999 series III** military specifications
- Miniature : **15 mm(.59") max** external diameter

FEATURES AND BENEFITS

- 4 pairs totally insulated throughout the connector
⇒ minimum cross-talk between the four pairs
- Patent pending special interfacial shapes
⇒ minimum perturbation at the interface of each pair
- Thread coupling mechanism
⇒ 2000 mating cycles & high vibration resistance
- Machined Brass shells and RoHS compliant plating
⇒ shell to shell continuity and 500h salt Spray resistance
- Machined & gold plated Solder and Crimp contacts
⇒ design & performance according to the innercontact of M39029/77-429#16 M39029/76-425#16 38999 contact
- Solder contact : max AWG24
- Crimp contact : AWG 24 to 26
- IP68 sealing mated and unmated for receptacles
- 1500 Vrms Dielectric Withstanding voltage
- Temperature range : - 55°C / + 125°C


MARKETS & APPLICATIONS

- **DEFENSE** : C4ISR, Battlefield Communications, Shipboard, Ground Vehicles Vetronics.
- **AERONAUTICAL** : In Flight Entertainment, Avionics, Communication Systems.
- **RAIL MASS TRANSIT** : Passenger Information Systems, Communication Systems.




TRANSMISSION DATA


Insertion Loss

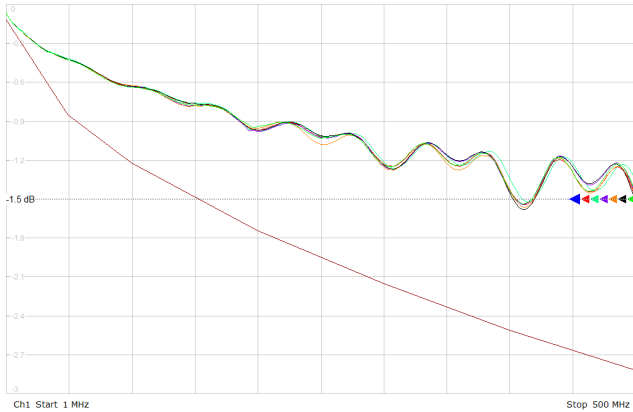





Next 1-2

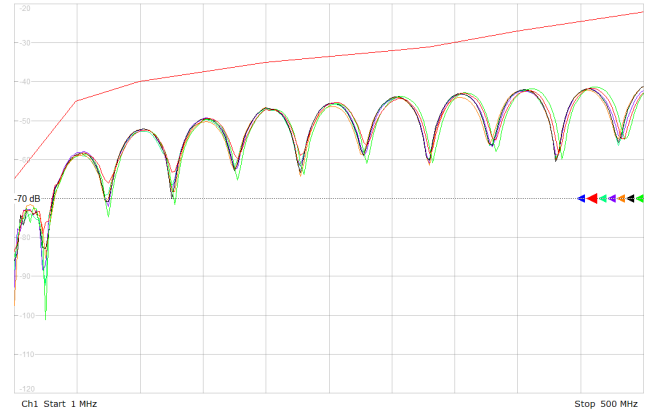

Return Loss

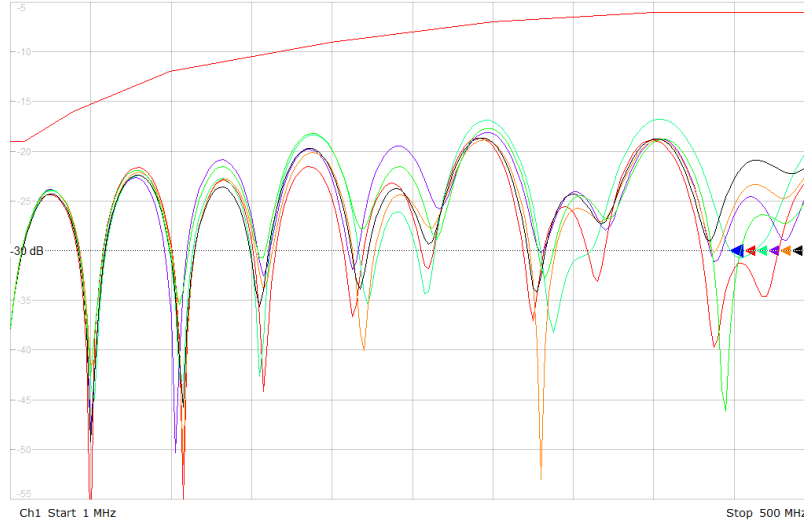


RECEPTACLE

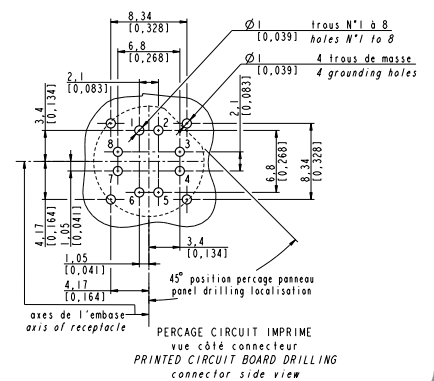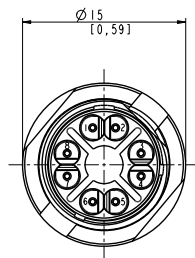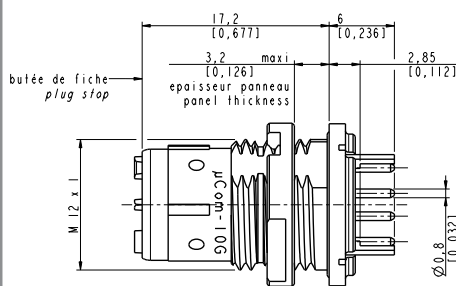


PLUGS & CORDSETS


Plug with Gland Backshell

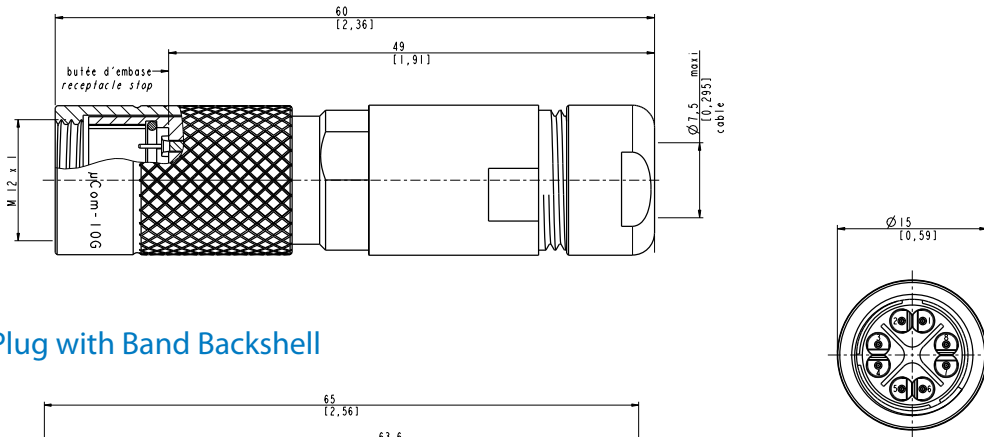

Plug with Band Backshell

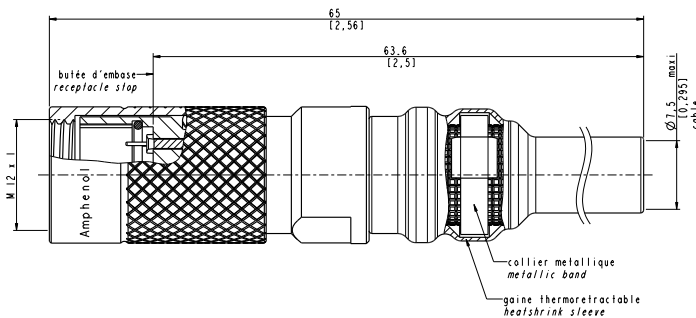

Plug - Plug Cordsets

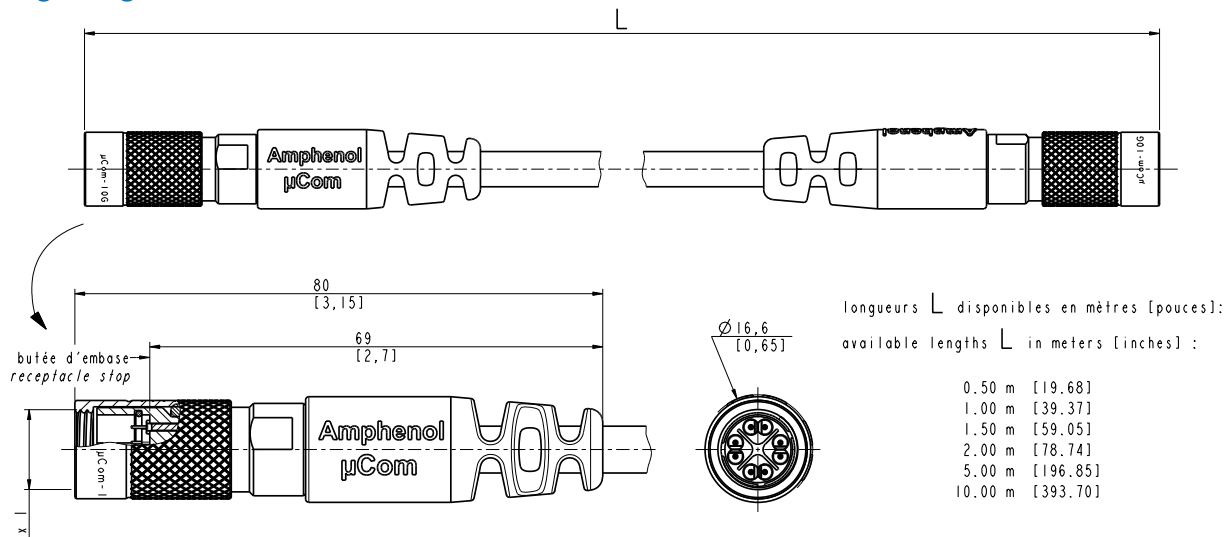

Type of Cable used : CAT 7 HFFR
According to EN 50288-4-2




- Stranded bare copper wire (26 AWG)
- 4 Screened twisted pairs: 2 wires twisted to a pair, Alulaminat foil overlapped
- Shield braiding of tinned copper wires, about 80% coverage
- Strain member of Kevlar

- Jacket in black Polyurethane (PUR), glossy finish, acc to DIN VDE 0282
- External diameter 7.0 +/-0.3 mm
- UV & Hydrolysis resistant, Halogen free, RoHS compliant
- Max Pull force: 800 N, Weight : about 54 kg/km
- Temperature : - 40°C / + 85°C


For full dimensions, please ask for Customer Drawing

IN LINE RECEPTACLES

In line receptacle with Gland Backshell

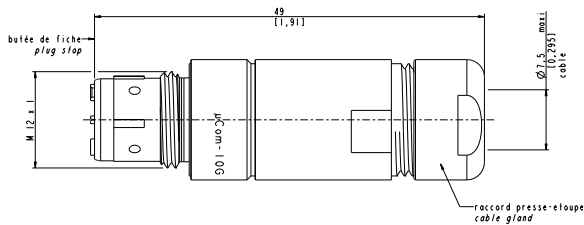


In line receptacle with Band Backshell

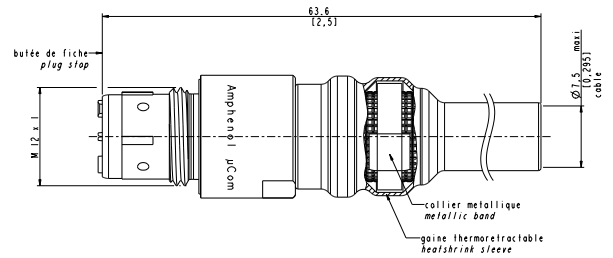

TOOLS AND ACCESSORIES

Receptacle Caps

Neoprene Version P/N : 31091

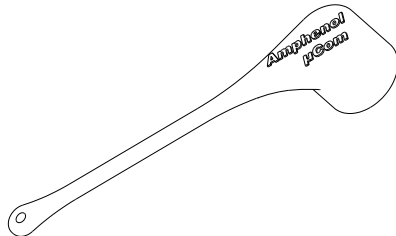


Nota : plan a type M3 hole on the panel

Metal Version P/N : 31057




Plug Caps

Neoprene Version P/N : 31092

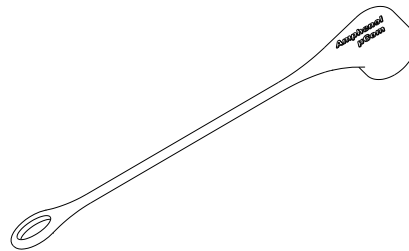

Receptacle Nut Clamping tool
P/N : 31055



Crimp Contact insertion tool

P/N : 31056



Contact positioner
For M22520/2-01 crimping tool
P/N : 31095



HOW TO ORDER

Receptacles

μCom - 10G + R P B

Shell
R Receptacle (push-pull or thread)
Contacts Termination
P PCB
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass

Plugs & In Line Receptacles

μCom - 10G + P T C B B A

Shell
L In Line Receptacle
P Plug
Mating (for plugs only)
T Thread
Contacts Termination
C Crimp
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass
Backshell Type
G Gland
B Band
Cable Diameter (For Gland Backshell Only)
A: for cable diam 7,5 mm
B: TBD

Plugs-Plugs Cordsets

with Cat7 HFFR Cable, Outdoor PUR jacket

μCom - 10G + C T C B 0 1 5

Shell
C Plug - Plug Cordset
F Plug Cordset-open
Mating (for plugs only)
T Thread
Contacts Termination
C Crimp
S Solder
Shell Plating
B Black Nickel
G Olive drab Cadmium
U Unplated Brass
Total Length
005 : 50 cm [19,68]
010 : 1,0 m [39,37]
015 : 1,5 m [59,05]
020 : 2,0 m [78,74]
050 : 5,0 m [196,85]
100 : 10,0 m [393,70]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[uCom-10G+ LCUB](#) [uCom-10G+ PTCBGA](#) [uCom-10G+ LSGGA](#) [uCom-10G+ PTSUGA](#) [uCom-10G+ PTCUB](#) [uCom-10G+ PTSGGA](#) [uCom-10G+ PTSUB](#) [uCom-10G+ LSUB](#) [uCom-10G+ LSBB](#) [uCom-10G+ LCGGA](#) [uCom-10G+ LSUGA](#) [uCom-10G+ PTCGB](#) [uCom-10G+ PTSGB](#) [uCom-10G+ LSBGA](#) [uCom-10G+ LCGB](#) [uCom-10G+ LCUGA](#) [uCom-10G+ LCBB](#) [uCom-10G+ LCBGA](#) [uCom-10G+ PTCUGA](#) [uCom-10G+ LSGB](#) [uCom-10G+ PTSBGA](#) [uCom-10G+ PTSBB](#) [uCom-10G+ RP G](#) [uCom-10G+ RP U](#) [uCom-10G+ PTCGGA](#) [uCom-10G+ RP B](#) [uCom-10G+ PTCBB](#)