


FireWire Cable

NEED CUSTOMS?
See Page 25

- Ideal for High Performance Data Transmission
- Ultra Flexible Cable for Confined Area and Continuous Motion
- Exceed FireWire Specs in a Flat, Compact Package

Comprised of 2 individually shielded 22 AWG power wires and 2 individually twisted shielded pairs of 28 AWG 100 ohm twinaxial configuration, Cicoil's Flexx-Sil™ jacketed FireWire cables are designed for highly demanding applications. Unlike typical FireWire cables, the Cicoil cable has been designed for high flexibility, mechanical stress, temperature extremes and harsh environments. And the flat cable construction guarantees clear, high speed data transmission, even in the toughest of environments.

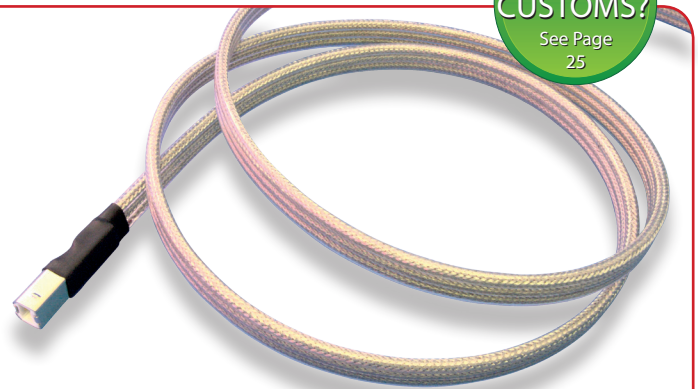

UL MEETS 94V-0

 RoHS COMPLIANT
 REACH COMPLIANT
 FAA FLAME TESTED

Applications
Indoor and Outdoor FireWire Applications

Cable

Amp Rating ¹		Conductor Gauge		Dimensions [inches]		Part Number
Power	Signal	Power	Signal	Width	Height	
8	5	22 AWG/2c	28 AWG/2 pr	0.38	0.12	FW-1000

Note
1. Amp rating is the maximum value for each conductor at room temperature of 70°F (21°C). Amp rating decreases as temperature increases.

Cable Assemblies



Please contact Cicoil for other connectors and length options.

Cable Length (feet)	Part Number Addition
3	-CA003
6	-CA006
12	-CA012


- Notes**
1. Append onto base cable Part Number for complete assembly. Example: FW-1000-CA003
 2. Connector ratings may differ from cable ratings; refer to manufacturer specifications.

Assembly Dimensions



- Connectors**
- Signal (J1): FireWire, P/N 154-FWW15-E

Dimensions

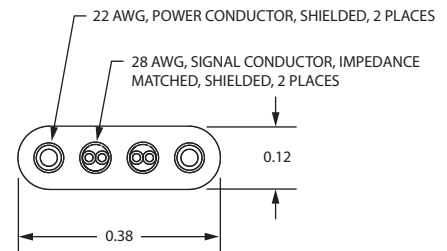

Cable Specifications

All engineering values are nominal and subject to change.

Mechanical	Environmental
Conductors: Ultra flexible, finely stranded, tinned copper	Temperature Rating: -65°C to +165°C
Shielding: Ultra flexible, braided shields, with 90% nominal coverage	Moisture Rating: Submersible, Salt Water Resistant
Minimum Bend Radius: - 6x cable height for intermediate flex - 10x cable height for continuous flex	Clean Room Rating: Class 1, Zero Particulates
Flex Life: 10,000,000 cycles nominal	Extreme Environments: Sunlight, UV Light, Alcohol, Chemical and Oil Resistant
Outer Jacket Durometer Rating: 65 (Shore A)	Electrical
	Outer Jacket Dielectric Strength: 450 volts/mil (17.7 kv/mm)
	See Electrical Rating Chart on Page 47

Options

Page

Additional Conductors	26
Low Friction Options	28
StripMount™ Integrated Mounting Strip	28
Integrated Tubing	29
SuperTuff™ Jacket	29
Colored Jacketing	29
Strip and Tin Cable Ends	29
FlexRail™ Self-Supporting Cable	30
Complete Assembly	31