



### 101367-000 PROBE

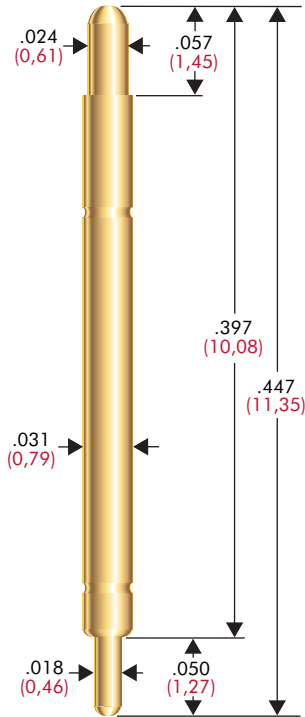

### 101367-001 PROBE

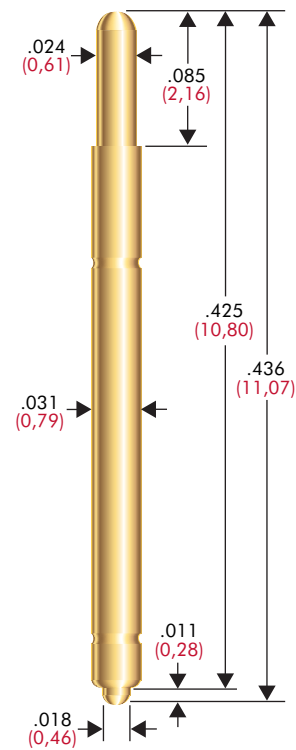

#### PROBE SPECIFICATIONS

Minimum Centers: .039 (1,00)  
Current Rating: 5 amps  
Spring Force: 3.7 oz (105g) @ .030 (0,76) travel  
Typical Resistance: 30 mΩ  
Maximum Travel: .057 (1,45)  
Working Travel: .030 (0,76)

#### MATERIALS

Barrel: Nickel/silver, gold plated  
Spring: Stainless steel, gold plated  
Plunger: Full-hard beryllium copper, gold plated  
Terminal: Full-hard beryllium copper, gold plated  
Special Features: Bias plunger design

#### HOW TO ORDER

101367-000

#### PROBE SPECIFICATIONS

Minimum Centers: .039 (1,00)  
Current Rating: 5 amps  
Spring Force: 3.7 oz (105g) @ .030 (0,76) travel  
Typical Resistance: 30 mΩ  
Maximum Travel: .057 (1,45)  
Working Travel: .030 (0,76)

#### MATERIALS

Barrel: Nickel/silver, gold plated  
Spring: Stainless steel, gold plated  
Plunger: Full-hard beryllium copper, gold plated  
Terminal: Full-hard beryllium copper, gold plated  
Special Features: Bias plunger design

#### HOW TO ORDER

101367-001

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

IDI:

[101367-000](#) [101367-001](#)