

Surface Mount Chip Capacitors


Safety Certified Surge Protection Chip

COG/X7R

Syfer Technology's Surge Protection (SP) range of ceramic chip capacitors are Class Y2/X1 compliant and designed for use in equipment certified to IEC 60950 (2000 Edition) where overvoltage surges can occur - i.e. a lightning strike.

This range of multilayer chip capacitors is approved and certified by TÜV. They meet the electrical requirements of IEC 60384-14: 1993 and EN 132400: 1994.

Also approved by UL for use in equipment certified to UL 60950 (previously UL 1950).

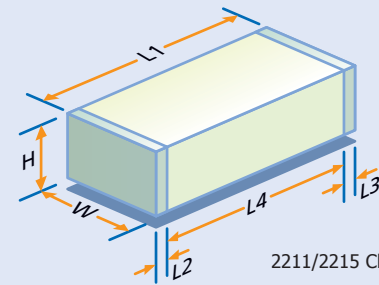

2211/2215 Chip Sizes

Case size	Nominal Cap value	Class	Dielectric	Tolerance	Approvals
2211	4.7pF	Y2, X1	COG/NP0	±0.25pF, ±0.5pF	UL/TÜV
2211	5.6pF	Y2, X1	COG/NP0	±0.25pF, ±0.5pF	UL/TÜV
2211	6.8pF	Y2, X1	COG/NP0	±0.25pF, ±0.5pF	UL/TÜV
2211	8.2pF	Y2, X1	COG/NP0	±0.25pF, ±0.5pF	UL/TÜV
2211	10pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	12pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	15pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	18pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	22pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	27pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	33pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	39pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	47pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	56pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	68pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	82pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	100pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	120pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	150pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	180pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	220pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	270pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	330pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	390pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	470pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	560pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	680pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2215	820pF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2215	1nF	Y2, X1	COG/NP0	±1%, ±2%, ±5%, ±10%	UL/TÜV
2211	100pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	120pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	150pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	180pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	220pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	270pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	330pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	390pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	470pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	560pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	680pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	820pF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV
2211	1nF	Y2, X1	X7R	±5%, ±10%, ±20%	UL/TÜV

Electrical Specification

Operating Temperature	-55°C to +125°C
Temperature Coefficient	COG/NP0 = 0 ± 30 ppm/°C, Ultra Stable Class 1 Ceramic (EIA Class 1) X7R = ±15%, Stable Class II Ceramic (EIA Class II)
Insulation resistance at +25°C	>100GΩ
Insulation resistance at +125°C	>10GΩ
Dielectric Strength (DWV)	1500VAC/3000VDC
Rated voltage	250VAC
Climatic Category (IEC)	55/125/56
Ageing rate	COG/NP0 = zero X7R = 1% per decade of time
Test parameters for capacitance	COG/NP0 = 1Vrms @ 1MHz @ 20°C X7R = 1Vrms @ 1KHz @ 20°C
Test parameters for DF	COG/NP0 = 1Vrms @ 1MHz @ 20°C X7R = 1Vrms @ 1KHz @ 20°C

Mechanical Specification

Length (L1)	5.7mm ± 0.4mm (0.225" ± 0.016")
Width (W)	2211 size 2.79mm ± 0.3mm (0.110" ± 0.012") 2215 size 3.81mm ± 0.35mm (0.150" ± 0.014")
Thickness (H)	2.54 (0.1) Max.
Termination Bands (L2, L3)	0.25 - 0.80mm (0.01" - 0.03")
Creepage Distance (L4)	4.0mm (0.16") Min.
Termination Material	Nickel Barrier (Tin over Nickel)
Solderability	IEC 68-2-20

Surface Mount Chip Capacitors

Safety Certified Surge Protection Chip

COG/X7R

Specification

Details

EN 132400: 1994 + **A2: 1998**
+ **A3: 1998**
+ **A4: 1999** Meets the electrical requirements of these specifications for class Y2, X1 devices.

IEC 60384-14 second edition 1993
+ **A1: 1995**

UL 60950: third edition
IEC 60950: 2000 Certified for use in equipment intending to be certified to these specifications.

IEEE 802.3 Meets the 1500Vrms isolation requirements of section 12.10.1 of this specification.

Approvals

Marked parts can be released as certified by TÜV (COG/NP0 and X7R). Unmarked parts can be supplied tested in accordance with, but not certified by TÜV.



TÜV Certificate Nos.
R60001955 and R60003753



UL 60950
6th Edition
UL Certificate
No E235189

Reeled Quantities	178mm (7")	330mm (13")
	1000	4000

Ordering Information

2211	J	A25	0102	J	X	T	SPU
Chip Size 2211 2215	Termination J= Nickel Barrier Y= FlexiCap	Voltage A25=250VAC	Capacitance Expressed in picofarads (pF). First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following. Example: 0102=1000pF. For values below 10pF insert a P for the decimal point. eg: 8P20=8.2pF	Tolerance <10pF C = ±0.25pF D = ±0.5pF ≥10pF F = ±1% G = ±2% J = ±5% K = ±10% M = ±20%	Dielectric C=COG/NP0 X=X7R	Packaging T = 178mm (7") reel R = 330mm (13") reel B = Bulk	SPU=Unmarked SP=Marked