


No.28AWG 7x0.127 Thinned Stranded Copper Conductor

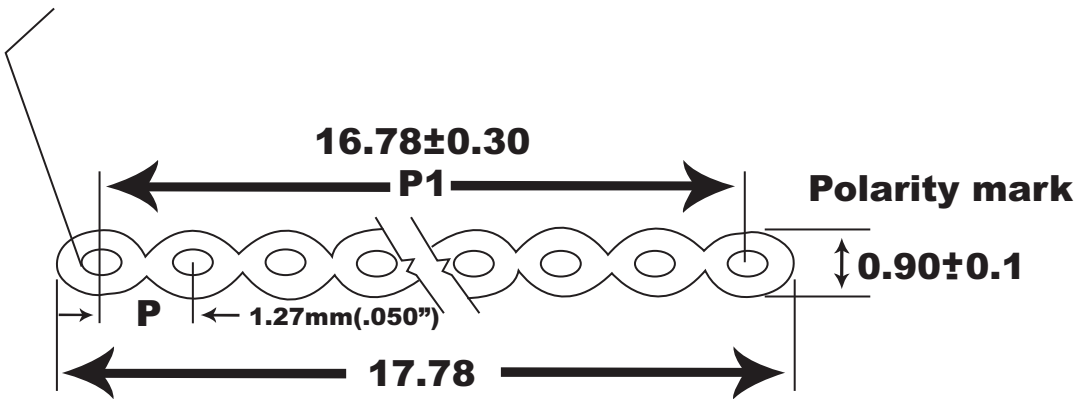

Electrical & Physical Characteristics:

- Voltage Rating: 300V
- Temperature Rating: 105°C
- Dielectric Strength: 2. OKV 60Hz 1 Minute
- Conductor Resistance: 237/KM Max.
- Insulation Resistance: 100M /M Min. @500V DC
- Tensile Strength Before Aging: 1,500PSI
- Tensile Strength After Aging: 70% Min. (136°C*168H)
- Elongation Before Aging: 100% Min.
- Elongation After Aging: 65% Min. (136°C*168H)
- Deformation Test 50% Max. (121°C*1H)
- Cold Bend Test: -10°C*4H No Cracking
- Horizontal Flame Test: VW-1
- UL File No. E189529
- UL Style: 2651-VW-1

Unit: MM



Scale	1:1							Name
TOLERANCE					Drawn	10.28.11	Chappell	Item No.
X.X	±0.40				Approved			AWG28-14/G/300
X.XX	±0.25							Title
X.XXX	±0.15							Flat Ribbon Cable - 14 Conductors, 1.27MM Pitch, 300 Feet-13" Reel, Grey
Angle	±3°							Drawing No.
								rev00
								Replace
								Sheet



Modification Date Name