




# Series 518 Single and Dual Row Socket Strips w/Collet Contacts & Solder Pin Tails

## FEATURES

- Collet Sockets available in Single or Dual Rows
- Cuttable to the number of pins desired to fit the application
- Side-to-side and End-to-end Stackable

## GENERAL SPECIFICATIONS

- **BODY MATERIAL:** Black UL 94V-0 Glass-filled 4/6 Nylon
- **PIN BODY:** Brass 360 1/2-hard per UNS C36000 ASTM B16/B16M-05
- **PIN BODY PLATING:** 10 $\mu$  [0.25 $\mu$ ] min. Au per MIL-G-45204 –OR– 200 $\mu$  [5.08 $\mu$ ] min. 93/7 Sn/Pb per ASTM B545 or 200 $\mu$  [5.08 $\mu$ ] min. Sn per ASTM B545 Type 1 over 100 $\mu$  [2.54 $\mu$ ] min. Ni per SAE AMS-QQ-N-290B
- **4-FINGER COLLET CONTACT:** BeCu per UNS C17200 ASTM B194-08
- **CONTACT PLATING:** 200 $\mu$  [5.08 $\mu$ ] min. 93/7 Sn/Pb per ASTM B545 –OR– 200 $\mu$  [5.08 $\mu$ ] min. Sn per ASTM B545 Type 1 or 10 $\mu$  [0.25 $\mu$ ] Au per MIL-G-45204 over 50 $\mu$  [1.27 $\mu$ ] min. [1.27 $\mu$ ] Ni per SAE AMS-QQ-N-290 Heavy 30 $\mu$  [0.76 $\mu$ ]
- **CONTACT CURRENT RATING:** 3 amps
- **INSERTION FORCE:** 180g/pin, based on 0.018 [0.46] dia. test lead
- **WITHDRAWAL FORCE:** 90g/pin, based on 0.018 [0.46] dia. test lead
- **NORMAL FORCE:** 140g/pin, based on 0.018 [0.46] dia. test lead
- **OPERATING TEMPERATURE:** 221°F [105°C] for Sn and Sn/Pb plating; 257°F [125°C] for Au plating
- **INSERTION FORCE:** 180g/pin, based on 0.018 [0.46] dia. test lead
- **WITHDRAWAL FORCE:** 90g/pin, based on 0.018 [0.46] dia. test lead
- **NORMAL FORCE:** 140g/pin, based on 0.018 [0.46] dia. test lead
- **ACCEPTS LEADS:** 0.015-0.025 [0.38-0.64] dia.
- **LEAD LENGTHS:** from 0.100 [2.54] min.

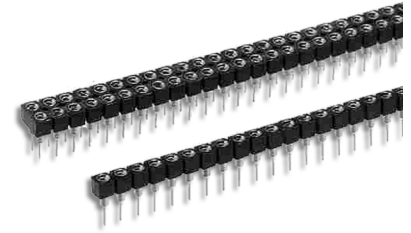

## ORDERING INFORMATION

XX X 518-1 XX XX

### Additional Options

- H = Heavy Au on Collet Shell
- T = Sn Collet, Sn Shell
- TL = Sn/Pb Collet & Shell
- E = Extra Long Solder Pin Tail

### Plating

- 0 = Au Collet, Sn Shell
- OTL = Au Collet, Sn/Pb Shell
- 1 = Au Collet & Shell

### Solder Pin Tail


### Series

- No. of Rows  
0 = Single  
1 = Dual

- No. of Pins  
1 to 40 – Single Row  
2 to 40 – Dual Row

## MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.030  $\pm$  0.002 [0.76  $\pm$  0.05] dia.

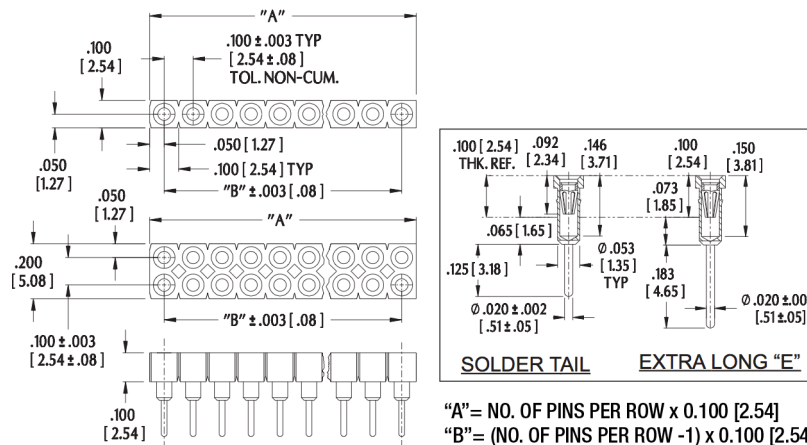

ALL DIMENSIONS: INCHES [MILLIMETERS]  
 ALL TOLERANCES:  $\pm$ 0.005 [0.13] UNLESS OTHERWISE SPECIFIED  
 FOR SOCKET STRIPS WITH WIRE WRAP PINS, SEE [DATA SHEETS 12021](#)  
 CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.  
 ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE  
 PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



2609 Bartram Road • Bristol, PA 19007-6810 USA  
 TEL 215-781-9956 • FAX 215-781-9845  
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



12020  
 Rev. 7.1  
 1 of 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [Aries Electronics:](#)

[12-0518-10T](#) [30-1518-11](#) [19-0518-11H](#) [19-0518-10H](#) [19-0518-10T](#) [22-0518-11H](#) [22-1518-11H](#) [22-1518-10T](#) [22-1518-10H](#) [22-0518-10T](#) [22-0518-10H](#) [35-0518-11H](#) [35-0518-10H](#) [35-0518-10T](#) [11-0518-10H](#) [11-0518-10T](#) [11-0518-11H](#) [35-0518-11](#) [35-0518-10](#) [39-0518-11](#) [39-0518-10](#) [31-0518-10](#) [31-0518-11](#) [37-0518-10](#) [27-0518-11H](#) [37-0518-11](#) [27-0518-10H](#) [27-0518-10T](#) [33-0518-11](#) [33-0518-10](#) [38-0518-10](#) [38-1518-10](#) [38-1518-11](#) [38-0518-11](#) [30-1518-10](#) [30-0518-10](#) [30-0518-11](#) [34-0518-11](#) [34-1518-11](#) [34-1518-10](#) [34-0518-10](#) [32-1518-10](#) [32-0518-10](#) [32-0518-11](#) [32-1518-11](#) [03-0518-10H](#) [03-0518-10T](#) [03-0518-11H](#) [30-0518-11H](#) [30-1518-11H](#) [30-1518-10H](#) [30-1518-10T](#) [36-1518-11](#) [36-0518-11](#) [36-0518-10](#) [36-1518-10](#) [30-0518-10H](#) [30-0518-10T](#) [34-1518-11H](#) [34-0518-11H](#) [34-0518-10T](#) [34-0518-10H](#) [34-1518-10T](#) [34-1518-10H](#) [07-0518-11H](#) [07-0518-10T](#) [07-0518-10H](#) [10-0518-10H](#) [10-0518-10T](#) [10-1518-10H](#) [10-1518-10T](#) [10-0518-11H](#) [10-1518-11H](#) [26-0518-10T](#) [26-0518-10H](#) [26-1518-10H](#) [26-1518-10T](#) [26-0518-11H](#) [26-1518-11H](#) [39-0518-10T](#) [39-0518-10H](#) [39-0518-11H](#) [02-0518-11H](#) [02-1518-11H](#) [02-1518-10H](#) [02-1518-10T](#) [02-0518-10H](#) [02-0518-10T](#) [15-0518-11H](#) [15-0518-10T](#) [15-0518-10H](#) [23-0518-10T](#) [23-0518-10H](#) [23-0518-11H](#) [27-0518-11](#) [27-0518-10](#) [23-0518-10](#) [23-0518-11](#) [21-0518-10](#) [21-0518-11](#)